

Electric Service Requirements:

Residential

August 2020

(Light Blue Book)

This booklet supersedes all previous editions.

Important! See Major Changes & Important Notes.

This manual with the most current changes will also be available online at:

www.myavista.com

MAJOR CHANGES & IMPORTANT NOTES

<u>Please contact Avista Utilities at 1-800-227-9187 when planning, and prior to starting construction of your electric project.</u>

- Residential services must have properly labeled outdoor emergency disconnect installed per NEC 230.85. See checklists in Section 3.0 Residential Service Requirements.
- Avista requires the customer to bring their service entrance including point of attachment up to the current Avista standards when the service is altered before permanent connection will be made. Customer conductor changes between load side of meter and customer panel do not qualify as an altered service. See Section 1.10.
- Avista will no longer attach to house knobs or chubs on new or altered construction. See Section 3.2.4.
- DO-X.XXX and DU-X.XXX refer to Avista internal Construction Standards
- A passed inspection by Authority Having Jurisdiction does not constitute approval by Avista. Avista has final approval.
- Only qualified Avista personnel are authorized to disconnect service conductors or pull meters.
- In rural areas or on service equipment not attached to a permanent structure, customer must install a phenolic label with the address on the meter can.
- Fire pumps may be fed with a separate service terminating at a Manual Circuit Closing (MCC) meter socket, and be within 25' of the building service.
- Where multiple services supply a building, meters shall be clearly marked with phenolic labels.
- For overhead installations, temporary service meter must be located on the same side of the building as the permanent service location.
- Customers shall not install conduit or excavate any area within 2' of Avista underground or padmount equipment.
- Service mast extending through roof shall not extend more than 6' above roof without preapproval by Avista representative.



- Couplings in the mast above the roofline are not allowed when the mast is being used for the anchor point for the service conductor.
- Overhead service mast must be a horizontal distance of 15' (minimum) from the source. This applies to both temporary and permanent overhead services.
- Meters installed on buried posts require concrete backfill around post.
- In applications where spaces for more than one service entrance disconnect are provided, Avista requires all positions to be fully populated so there are no empty positions at the time of service installation.



TABLE OF CONTENTS

MAJOR CHANGES & IMPORTANT NOTES	I
TABLE OF CONTENTS	. III
PREFACE	6
SAFETY	7
CONTACT INFORMATION	9
1.0 GENERAL SERVICE REQUIREMENTS	10
1.1 UTILITY RATES & REGULATIONS	10
1.2 ELECTRICAL PERMIT & INSPECTION	10
1.3 CONNECTION REQUIREMENTS	10
1.4 AVAILABILITY OF SERVICE	11
1.5 SERVICE AGREEMENT	11
1.6 POINT OF DELIVERY	11
1.7 FLAT RATE ACCOUNTS	15
1.8 AVAILABLE PHASE and VOLTAGE	15
1.9 SERVICE ENTRANCE CONDUCTORS	
1.10 SERVICE CHANGES/ALTERED SERVICE	
1.11 LOAD ADDITIONS	
1.12 INSTALLATION AND REPAIR	19
1.13 LANDSCAPING	
1.14 TREE TRIMMING	20
1.15 OTHER UTILITIES	20
1.16 EQUIPMENT PROTECTION	
1.17 CUSTOMER OWNED EQUIPMENT ON AVISTA	
	20
POLES	20
1.19 MOTORS	
1.20 UNDERGROUND SERVICE CUSTOMER	
REQUIREMENTS	21
1.21 SERVICE CONDUIT	
1.21.1 General Requirements	
1.21.2 Conduit Type	24
1.21.3 Conduit Trade Size and Number	25
1.21.4 Sweep Size	
1.21.5 Location of Joint Use Vaults at Avista Poles	
1.21.6 Joint Use New Riser Installations	29
1.22 CLEARANCE OF GAS METERS TO ELECTRIC	
METERS	32



1.23 AVAILABLE FAULT CURRENT AT POINT OF	
	.33
1.24 METER ENCLOSURE INSTALLATION IN FLOO	
ZONES	35
1.25 POWER QUALITY	
2.0 TEMPORARY OR CONSTRUCTION SERVICE	. 38
2.1 TEMPORARY OVERHEAD SERVICE	.38
2.2 TEMPORARY UNDERGROUND SERVICE	41
3.0 RESIDENTIAL SERVICE REQUIREMENTS	. 43
3.1 RESIDENTIAL SERVICE CUSTOMER CHECKLIS	Т
3.2 OVERHEAD SERVICE	45
3.2.1 Point of Delivery	
3.2.2 Service Mast	
3.2.3 Multiple Masts	
3.2.4 Anchor Point	
3.2.5 Service Clearances	
3.2.6 Overhead House Mast	
3.2.7 Overhead to Overhead Service Pole	
3.2.9 Overhead Service Clearances At Building	
3.2.10 Clearances to Buildings and Appurtenances	
3.2.11 Overhead Service Clearances Over Ground and	.00
Buildings	.62
3.2.12 Clearances Around Swimming Pools and Hot Tubs	.64
3.3 UNDERGROUND SERVICES	66
3.3.1 Point of Delivery	
3.3.2 Service Ditch	
3.3.3 Service Ditch Detail	
3.3.4 Clearance to Transformers	.70
3.3.5 Clearance to Other Equipment Buildings & Swimming	
Pools	.72
3.3.6 Residential Underground Service	
3.3.7 Underground Service Pedestal	
3.3.8 Pipe/Post Type Meter Pedestal	.80
Transformer	01
3.3.10 Conduit Entrance Single-Phase Transformer	
3.3.11 Conduit Entrance 1&2-Phase Padmounted Junction	. 55
Enclosures	.86
4.0 METERING REQUIREMENTS	87
4.U IVIC I CRIING REGUIRENTO	- n/



4.1 GENERAL	87
4.1.1 Listing	
4.1.2 Location	
4.1.3 Meter Room Requirements	88
4.1.4 Meter Identification	91
4.1.5 Security	91
4.1.6 Meter Mounting	
4.1.7 Lifting Handles	92
4.1.8 Sprinkler Service	
4.2 SELF CONTAINED METERING	
4.2.1 Manual Circuit Closing (MCC) Sockets	
4.3 METERING EQUIPMENT RATINGS AND TYPE	
4.3.1 Approved Self-Contained Sockets	
4.3.2 Self-Contained In-Line Socket Diagrams	
4.4 INSTRUMENT TRANSFORMER METERING	
4.4.1 Current Transformer Location	
4.4.2 CT Metering Conduit Requirements	
4.4.3 CT Enclosures - General Requirements	
4.4.4 Single Phase Current Transformer Metering	98
5.0 SERVICE VOLTAGES	100
6.0 CUSTOMER GENERATION REQUIREMENTS	102
6.1 Generation Interconnection	102
6.2 Emergency / Standby Generation	
7.0 ELECTRICAL FORMULAS & COMMON TERMS	108
APPENDIX A – LIST OF FIGURES	111
APPENDIX B – LIST OF TABLES	113
INDEX	11/



PREFACE

<u>Please contact Avista Utilities at 1-800-227-9187 when planning, and prior to starting construction of your electric project.</u>

If you are planning to install, repair, or upgrade your electric service, you probably have some questions and concerns. Avista has designed this handbook to help guide you through the process.

This handbook includes Avista's requirements. They must be met before a new or modified electric service can be connected. Although we have tried to include everything, please call your nearest Avista Utilities office for further details or questions. Spending some extra time during your project's planning phase can save time and minimize confusion as it moves ahead.

This handbook supersedes all previous editions. It is published yearly, but since requirements are subject to change without notice please coordinate your work with Avista.

For the purposes of this book, residential services are those that serve individual residences, apartments, mobile homes or living units for domestic purposes. Commercial services include all other services.



SAFETY

Please contact Avista Utilities at 1-800-227-9187 when planning, and prior to starting construction of your electric project.

CALL BEFORE YOU DIG





CALL 2 DAYS BEFORE YOU DIG


NATIONAL # 811

LOCAL AREA NUMBERS

1-800-424-5555
1-800-424-5555
1-800-324-1585
1-800-553-4344
1-800-398-3285
1-800-626-4950



NOTICE

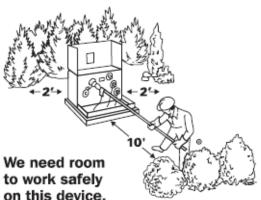

on this device.

Shrubs and landscaping should be 10 feet from front and 2 feet from sides and backs.

Obstructions will cause delays when restoring electric service and will be removed as necessary and not replaced.
For information call

Avista Utilities at 1-800-227-9187.

WASHINGTON-WAC 296-45B-450 IDAHO-IPUC TARIFF NO.28 WASO60-S-A2-H3



CONTACT INFORMATION

Avista Utilities Call Center	1-800-227-9187
Clarkston / Lewiston / Orofino	(208) 798-1472
Coeur d'Alene	(208) 769-1377
Colville	1-800-227-9187
Davenport	(509) 725-2467
Deer Park	1-800-227-9187
Electric Meter Department	1-800-227-9187
Grangeville	(208) 983-0711
Kellogg	(208) 786-6931
Othello	1-800-227-9187
Pullman / Moscow	(509) 336-6240
Sandpoint	1-800-227-9187
Spokane	(509) 495-4180
St. Maries	(208) 245-2222



1.0 GENERAL SERVICE REQUIREMENTS

<u>Please contact Avista Utilities at 1-800-227-9187 when planning, and prior to starting construction of your electric project.</u>

These guidelines are based on the typical utility practices necessary to supply reliable and safe service. All meter and service equipment required for the construction of new or remodeled installations as well as services disconnected for a period of one year or more and all seasonal installations must meet these guidelines. In addition installations must conform to the rules and regulations of the inspection authorities having jurisdiction. These regulations include, but are not limited to the National Electrical Code, National Electrical Safety Code, State Rules and Regulations, City and County ordinances and codes, and rules on file with or issued by the Public Utility Commission.

1.1 UTILITY RATES & REGULATIONS

Copies of Avista's currently effective rates, rules, and regulations filed with the Public Utility Commission are available to you on request or at www.avistautilities.com.

1.2 ELECTRICAL PERMIT & INSPECTION

The customer or their electrician is responsible for obtaining an electrical permit before work is started and having their completed work inspected by the authority having jurisdiction. The authority having jurisdiction may be a federal, state, local, or other regional department or individual such as a fire chief; fire marshal; chief of a fire prevention bureau, labor department, or health department; building official; electrical inspector; or others having statutory authority. Federal buildings must have electrical inspection by third party. A passed inspection by Authority Having Jurisdiction does not constitute approval by Avista. Avista has final approval.

1.3 CONNECTION REQUIREMENTS

Avista will only connect a new service meeting Avista's requirements to equipment which has passed local inspection and has a visible inspection sticker posted on the meter socket.

When Avista disconnects a service to allow an electrical upgrade or altered service it will be reconnected if the modifications meet our current standard requirements and;

- If work is performed by the <u>property owner</u> a final inspection approval must be posted on site
- If work is performed by a <u>licensed electrician</u> inspection requirements vary by local electrical inspection office. The electrician should call the local Avista office for current Avista standard requirements. See Contact Information in a previous section.
- 3. Inspection of that service and equipment is required before reconnection and service must meet current Avista standards. In some cases an official inspection by the governing agency may also be required.
- 4. If any service has been disconnected for a period of one year or more both an Avista inspection and a safety inspection by the governing agency is required.



- 5. 48 hour notice must be given to Avista for disconnection of service conductors or removal of any meter locking device.
- 6. Avista will not attach any services and facilities to trees.
- Replacement of mobile homes at a service constitute a major change and require both an Avista inspection and a local electrical inspection by the governing agency.
- 8. Seasonal installations that are shut off for less than a year are subject to an Avista safety inspection and can be required to bring installation up to current code requirements if deemed unsafe.
- 9. In rural areas or on service equipment not attached to a permanent structure, customer must install a phenolic label with the address on the meter can. Phenolic labels can be purchased from the following suppliers: Engraver at 3817 N. Monroe, Spokane; Quick Engraving at 1527 E 9th, Spokane; and Northwest Business Stamp at 5218 N Market, Spokane.

1.4 AVAILABILITY OF SERVICE

It is important that Avista be provided, as soon as possible, with accurate load information and other requested data before the purchase or installation of equipment and wiring. This will allow Avista to determine the availability of service, service location and available voltage.

1.5 SERVICE AGREEMENT

For new installations a signed service agreement and payment is required before Avista's work can be scheduled.

1.6 POINT OF DELIVERY

The point of delivery is the location where Avista's service conductors and the Customer's service entrance conductors are connected. Avista requires a building be served using a single point of delivery, supplied through a single meter installation, at a single voltage and phase classification unless permitted by exception.

- Avista owns, installs, and maintains equipment on the source side of the point of delivery as well as the meter and instrument transformers. The Customer is responsible for the equipment on the load side.
- Buildings, subdivided into individual tenant spaces, require multiple meters for the
 individual tenants. The service entrance conductors for these meters must be fed
 from a main disconnect, switch board or bussed together to provide a single point
 of delivery.
- Metering equipment is located outside of building as close as practical to the point of delivery, but in no case more than 25 feet.
- The customer is responsible for providing equipment to Avista specifications needed to provide one point of connection. See the Residential section for acceptable point of delivery equipment.
- The point of delivery is to be located outside and above ground except in the Spokane Downtown Network. Avista will no longer pull underground secondary



conductors through an outside wall or through a slab into a customer's building or structure. The point of delivery will be on the outside wall in a customer provided Pulling/termination enclosure or free standing pulling enclosure mounted on (2) 2 inch rigid steel pipe (in concrete) with unistrut as needed and must be within 25 feet of metering equipment. An underground service over 1200 amps will require outside mounted switch gear if multiple meters are needed and the transformer is not dedicated to one service.

Note: Contact with the appropriate Avista representative during the early planning and design phase of a project is recommended to help alleviate costly and time consuming modifications (made by the customer) and required by the utility to meet these requirements.

Exceptions Allowing Multiple Services:

Exceptions require prior written approval by Avista and if required, approval by the Authority Having Jurisdiction: Additional services may be subject to Exceptional Costs.

- Buildings with multiple privately owned townhouses or zero lot line construction must be provided with an individual point of delivery for each premise.
- Existing single space buildings sub-divided into two or more separate buildings, having two or more separate addresses due to installations of approved Party Walls, constructed as fire walls without openings, in accordance to the International Building Code (Section 706) and approved by the local jurisdiction, can each be served with separate electric and or gas services.
- Where multiple services supply a building, meters shall be clearly marked with phenolic labels.

Location

Contact an Avista Construction Representative to determine the location of the point of delivery and meter before installing any equipment. Avista provides service locations based on capacity requirements, service quality, safety, access, and cost. All of the following will be considered when determining the location for the point of delivery.

- Overhead point of delivery at a location with line of site to Avista's facilities.
- For accessibility it should be installed outside in an unlocked area. Enclosed
 patios, porches, carports, and fenced areas which prevent access must be
 avoided. <u>Fenced areas accessible by Avista must be preapproved by Avista
 representative</u>.
- Provide required clearances from and over present and future buildings, garages, driveways, parking areas etc. for overhead service conductors.
- Provide required clearances from buried objects, like septic systems, drain fields and fuel tanks for underground service conductors.
- Avista will not route underground primary URD cable or service wire under buildings. Any building built over existing underground primary or secondary conductor will not be energized until overbuilt conductor is moved at customer expense. Reference: NESC 351 C2.



- Altered Services normally do not require relocation unless there are serious conflicts with Avista's service location requirements. For example serious conflicts would be failure to meet code required clearances, critical access, or safety concerns.
- Preferred Residential Locations
- For overhead installations, temporary service meter must be located on the same side of the building as the permanent service location.

Failure to install service entrance in a location approved by Avista could result in customer having to move equipment at their expense



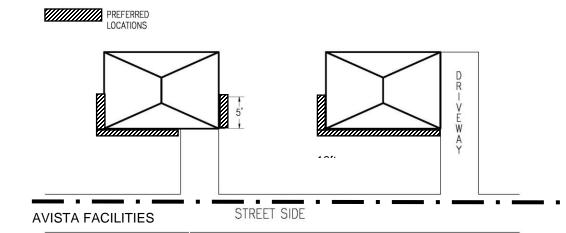


Figure 1 – New Underground or Overhead Electric Service Transformer or Handhole on the Street Side

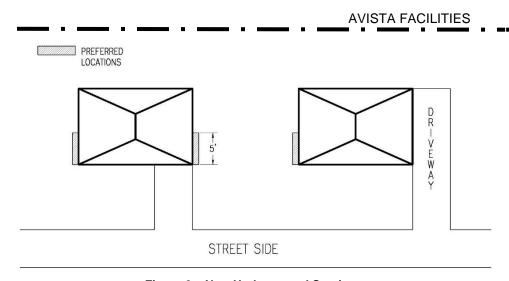


Figure 2 – New Underground Service Transformer in the Backyard



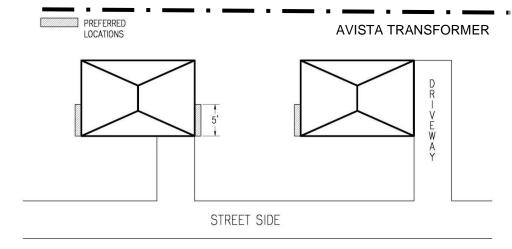


Figure 3 – New Overhead Service Transformer in Backyard

1.7 FLAT RATE ACCOUNTS

Avista requires all loads to be metered, but reserves the right to flat rate certain fixed loads under special circumstances (such as lighting). The terms related to any flat rate situations must be set forth in an agreement between Avista and the customer. Under no circumstances will Avista flat rate any variable loads.

1.8 AVAILABLE PHASE and VOLTAGE

The number of phases and service voltage are subject to availability at your location. Contact an Avista Construction Representative for determination. <u>Special permission is required for more than one service voltage serving a single building.</u>

On three phase services, all single phase loads must be balanced between the three phases, except for a four wire delta service.

A list of available service voltages can be found in the Standard Service Voltages section of this booklet.

<u>Single phase 120/240V services shall not exceed 800 amps of continuous load.</u> If load exceeds 800 amps then service must be 3 phase 120/208 or 277/480 volt. All service meters to be located on outside of building.



1.9 SERVICE ENTRANCE CONDUCTORS

Service entrance conductors must be specified and installed in accordance with the national, state and local electrical codes. In addition they must meet Avista's specific requirements.

- The neutral conductor shall be marked with a white strip or tape.
- The customer service entrance conductors will be connected to bottom position in socket.
- On four-wire, 120/240 volt delta installation, an orange marker shall be used to identify that phase which is approximately 208 volts to ground (high leg or power leg). This shall be located on the <u>right side</u> of the meter socket, CT landing platform and in the middle of the main disconnect.
- Metered and non-metered circuits shall not be run in the same raceway or conduit.



SCOPE:

This standard documents the long standing practice of only marking secondary cable at the service point with tape that marks phase rotation and not phase designation.



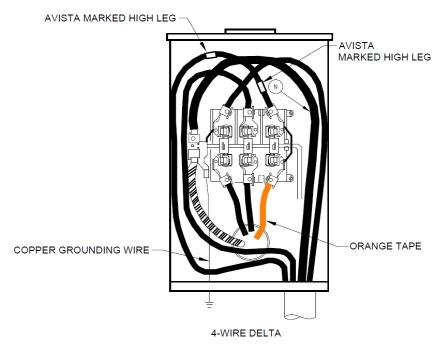


Figure 4 - Cable Phase Rotation Marking

AVISTA Utilities Distribution Standards DU-7.120/ESR



NOTES:

- Always verify voltage and rotation before working on any existing 3 phase service regardless of existing markings.
- Avista's standard practice is to use red, white and blue tape only for marking phase
 rotation on the utility side of the service point. No other color tape will be used to
 mark rotation on the utility side of the service point.
- 3. On a 4 wire 120/240 service, always mark the high leg or (power leg) blue. The other two hot legs shall be marked red and white.
- 4. The NEC code for marking the high leg or (power leg) on a 4 wire 120/240 meter socket or weatherhead is orange. Always connect the blue marked conductor to the orange marked lug or conductor for this voltage. On 3 phase services and secondaries, red, white and blue tape is used for marking phase rotation only, and does not indicate any specific voltage.
- 5. Avista will supply ABC or CBA rotation to the weatherhead or meter socket. On new installations, it is up to the electrician to establish the desired rotation.
- 6. Red, white and blue tape can also be used for marking both ends of service conductors during installation on multiple run services.
- 7. Red, white and blue tape matches the red, white and blue leads on Avista standard purchased rotation meters.
- The NEC code for marking the neutral is white. Avista does not mark the neutral.
 On multiplex underground cables, the neutral conductor is marked with a yellow stripe. The NESC code does not specify any color coding for phase rotation or voltage.
- 9. While performing maintenance on an existing 3 phase overhead or underground service, the established rotation must be maintained.
- During a scheduled or unscheduled outage, customer electrician may need to be on site to reestablish the correct phase rotation.
- 11. All secondary and service cables shall be marked on both ends using Avista standard cable marking tags (575-0830). Refer to DU-4.320 for instructions on punching out the necessary information for a specific run of cable.

REFERENCES:

- 1. Refer to DU-4.320 Cable Marking CMT.
- 2. Refer to Avista Electric Service Requirements Book latest edition.

AVISTA Utilities Distribution Standards DU-7.120/ESR



1.10 SERVICE CHANGES/ALTERED SERVICE

Whenever major changes, relocations, or additions are made to the electrical service, metering must be modified to meet current Avista standards.

Avista will consider a service to be altered when one of the following occurs and will require the customer to bring their service entrance including point of attachment up to the current Avista standards before permanent connections will be made.

- a) Customer mast or conductors in mast are changed/moved or upgraded.
- b) Location of the service entrance is moved.
- c) The meter can is changed/repaired/ or upgraded.

1.11 LOAD ADDITIONS

It is the customer's responsibility to notify Avista when adding significant load. Before installing electric tankless water heating systems, central air conditioners, electric vehicle chargers, central electric space heating, large motors and/or other major loads please contact Avista. Avista representatives will help to determine it the transformer and service wires are adequate for the increased load. In some cases Avista will need to install larger transformers and wires to accommodate the increased load. The costs of these changes may be charged to the customer.

1.12 INSTALLATION AND REPAIR

The customer provides, maintains, and operates at their expense all wiring and equipment, except the meter, on the load side of the point of delivery.

The customer owns the meter socket and is responsible to remove or remount it to facilitate the installation of siding. Siding shall be installed so as not to interfere with the installation or removal of the meter.

Avista provides, maintains, and operates at their expense all wiring, poles and equipment, on the source side of the point of delivery. In addition Avista is responsible for the installation, repair, and calibration of the electric meter.

Note: On new construction and customer requested changes/alterations to the existing system, the customer will be responsible for the costs of material and labor required by the utility to meet the customer's request. Contact local Avista representative for details on requirements and costs.



1.13 LANDSCAPING

Avista provides information on acceptable methods for screening of pad-mounted transformers and switching enclosures. These designs should be tailored to fit specific needs of the home or business owner. This information is available from your local Construction Office.

1.14 TREE TRIMMING

The customer is responsible to keep trees and bushes away from overhead service conductors from the pole to the building. Avista will disconnect the service to make trimming safe. Call Avista 48 hours in advance of the work. Service disconnects done on weekends and after normal Avista business hours will require a charge to the customer.

A minimum of 3' of clearance is required from service conductors.

1.15 OTHER UTILITIES

It is the customer's responsibility to coordinate the use of a joint ditch or poles before the permanent service is connected. Required clearances between utilities must be met.

1.16 EQUIPMENT PROTECTION

It is the responsibility of the customer to provide power conditioning devices that may be required to provide the quality of "power" necessary for optimum performance of their sensitive equipment such as computers or other electronic appliances. Since power disturbances can be created on the utility or customer side of the delivery point, the best locations of these devices may be at the equipment.

Residential customers using computers or critical non-interruptible equipment are encouraged to upgrade their meter sockets to provide manual circuit closing to prevent accidental outages during meter maintenance.

Customers are responsible to provide protection for their equipment that could be damaged by single phasing of three-phase loads.

Customers are responsible for mast and meter protection from ice and snow loading.

1.17 CUSTOMER OWNED EQUIPMENT ON AVISTA POLES

<u>Customer owned metering, switches, luminaries, signs or other equipment shall not be</u> <u>mounted on Avista's poles.</u>

1.18 METER SEALS

The purpose of meter seals is for safety and prevention of tampering. <u>Only Avista</u> personnel shall remove seals.

<u>Caution:</u> With some types of meter bases, removal of the meter does not de-energize the service.



Any person, who cuts Avista seals and/or wrongfully obtains electric service by bypassing, tampering with, or modifying a meter, may be convicted of a crime and billed for costs associated with investigation.

Bypassing meter sockets by electricians or customers is not allowed for any reason without Avista approval. All power must be metered.

1.19 MOTORS

Three phase motors 35 horsepower or larger and frequently started 10 horsepower and larger motors may require reduced-voltage starting equipment. Avista requires reduced-voltage starting in some cases to limit voltage flicker and the problems it causes. Avista will furnish starting flicker calculations on request. The allowed starting current will depend on the frequency of starting, and the size of the electrical service. Customers can install reduced voltage starting equipment to reduce voltage flicker. Three phase motors 25 horsepower or larger require closed delta or wye service.

1.20 UNDERGROUND SERVICE CUSTOMER REQUIREMENTS

Avista Utilities will provide underground electric service under the following conditions:

- The location of transformer shall be specified by Avista before the start of site preparation.
 - The transformer must be located to provide the clearances described in DU-4.222 and DU-5.020.
- The location of the point of service shall be specified by Avista before the start of site preparation.
- 3. The customer must provide accurate electric load sizing information as calculated according to the National Electric Code.
- 4. The customer must indicate the desired number and size of customer service conduits and cables. If the customer specified secondary conductors exceed the limits of the transformer, Avista may be required to install a secondary enclosure (DU-5.124) at the customer's expense. When provided, a secondary enclosure becomes the point of service, regardless where the meter resides. Increasing conductor size to reduce the number of parallel conductors may help to avoid the need for a secondary enclosure.
- All conductors on the customer's side of the service point (customer owned) must be sized per the National Electric Code (NEC) which differs from utility owned conductors which are sized according to the National Electric Safety Code (NESC).
- 6. A customer's failure to provide complete and accurate load and/or secondary conductor information prior to Avista's utility construction design and/or contract signing may result in either costly changes for the customer. This may include but is not limited to the Customer having to change the quantity and size of Customer installed service conductors.



- Concrete transformer pads provided by the customer must meet the requirements of DU-5.112 and conform to the size requirements specified by Avista.
 - Avista will provide a ground sleeve for installation below the window in the pad or may require the customer to provide an acceptable vault under the pad.
- 8. The direction of entrance of customer conduits shall be specified by Avista to avoid conflict with primary voltage conduits and cables.
- The customer shall meet the requirements of the company's electric extension tariff, Schedule 51, including payment of costs in advance of construction and the general and special terms of the Electric Service Agreement Avista (Form 1475).
- Customer-provided ditch and conduit installations must meet Avista standards.
 Any damage prior to the company's acceptance of the work must be repaired at the customer's expense.

REFERENCES:

- 1. Avista Electric Service and Meter Requirements.
- 2. Refer to Construction Standard DU-5.020 for transformer clearances.
- Refer to Construction Standards DU-5.122, 5.123, 5.124 and DU-4.222 for construction of concrete transformer pads and the space allocated to the service.
- Refer to Construction Standards DU-1.430 and DU-7.450 for ditching requirements.
- 5. Refer to Construction Standards Section 4.7 for conduit requirements

AVISTA Utilities Distribution Standards DU-9.110 ESR



1.21 SERVICE CONDUIT

The following information is intended for the installation of electrical service conductor. This information does not apply to roadway crossings or primary conduit systems.

1.21.1 General Requirements

- Conduit is required in all areas for Avista service conductor.
- Run conduit as straight as possible with the exception of the sweeps required by Avista. The conduit route, distance, sweep angles, size and number of runs must be pre-approved by the Avista Customer Project Coordinator.
- Avista must approve conduit installation prior to backfilling. Do not backfill the
 last 5 feet to the transformer or handhole until Avista crews have completed the
 connection. (Note: The conductor will not be energized until the backfill has been
 completed.)
- The customer is responsible to obtain all necessary permits.
- Customers shall not install conduit or excavate any area within 2' of Avista underground equipment.
- Conduits that are run to the base of a pole must terminate with a sweep at the exact location on the pole designated by Avista.
- Multiple runs must be bundled together. Conduit sweeps entering handholes or transformers must also be bundled together. Service conduits enter the left hand side of a single phase transformer as viewed from the front.
- Pull strings are required on all conduit runs and should be approximately 1/8 inch
 in diameter and must be adequate to pull a 1/2 inch rope the entire distance of
 the conduit run when required.
- The ends of the conduit must be taped or capped, and sealed to keep dirt and water out of the conduit. Customer is responsible for any obstructions within the conduit.



1.21.2 Conduit Type

- All conduits shall be gray electrical PVC. Galvanized rigid metal conduit (RMC) may be substituted for PVC above ground for greater mechanical protection.
- All conduits and fittings shall be a minimum of schedule 80 PVC above ground and schedule 40 PVC below ground. Schedule 40 PVC sweeps must be entirely below grade.
- Riser conduits shall be plumb.
- All conduit connections must be glued and fully seated.
- Swedge couplings required on all 2", 3", and 4" conduit.
- Factory bell ends are allowed for connections in lieu of swedge couplings.

Note: PVC conduit risers shall have a telescoping coupling (Expansion Coupling) inserted just before the meter as a measure to allow for the settling of the ground and to prevent damage to the customer's meter base.



1.21.3 Conduit Trade Size and Number

- For conduit runs with up to three sweeps (270 degrees or less), including the source and the termination sweeps, and up to 200 feet in length, the diameter of the conduit shall be as specified below. For other designs contact Avista.
- Heated bends are allowed up to 30 degrees. The conduit diameter and consistency of the radius must be maintained.

Cable Size	SIZE OF CONDUIT		
Cable Size	2 Inch	3 Inch	4 Inch
#2 TXUG	1	2 or 3	
2/0 TXUG	1		2 or 3
4/0 TXUG		1	2
350 TXUG		1	
2/0 QXUG		1	2
4/0 QXUG		1	
350 QXUG		1	
4-750 AL			1
4-250 CU		1	2
4-500 CU			1

Table 1 - Service Conduit Sizing



1.21.4 Sweep Size

Conduit Size	Minimum Sweep Radius
2"	24"
3"	30"
4"	36"

Table 2 - Conduit Sweep Sizing

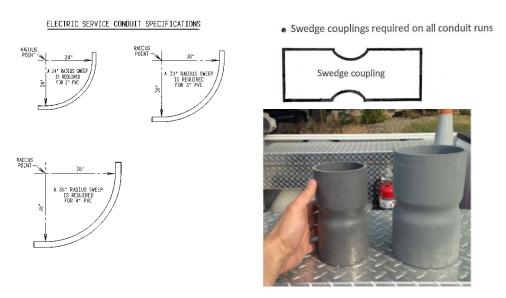


Figure 5 – Electric Conduit Sweep Specifications

- Any conduit sweep that extends above the ground line must be schedule 80 PVC.
- Any conduit fittings must be a minimum of schedule 40 PVC or schedule 80 PVC if above grade.
- 2, 3, and 4" Swedge couplings and Schedule 80 sweeps are available at CED 3333 E Main Spokane (509) 535-8891 and Graybar 4001 E Ferry Spokane (509) 532-7100 or other electric supply stores.



1.21.5 Location of Joint Use Vaults at Avista Poles

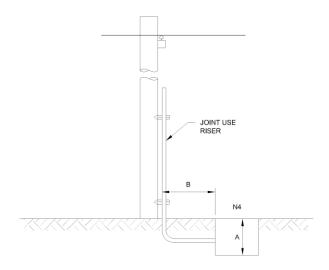


Figure 6 – Location of Sweeps on Avista Poles

NOTES:

- 1. Risers are not allowed on Avista Utilities air switch poles.
- No later than two business days prior to any excavation deeper than 12 inches, the excavator is required by law to mark the area of excavation and contact the local "One Call" office.
- 3. Minimize the disturbance of soil, at the pole, to prevent loss of treated soil and premature deterioration of the butt of the pole.
- All excavations for handholes, manholes and vaults must be no closer, to the pole, than five feet or the depth of the excavation (A = B), whichever is greater.
- Backfill must be tamped or otherwise compacted to prevent settling and must be protected from erosion.
- 6. The joint user is responsible for the cost of installing risers, conduits, ditches and manholes which it uses for its communications cables. Risers which connect to communication handholes, manholes or vaults will be owned and maintained by the communication company. Risers which connect to Avista Utilities handholes, manholes, or vaults will be owned and maintained by Avista Utilities.
- 7. Equipment such as power supplies must be mounted under the electric crossarm and must not block space for additional communication attachments or climbing space. Large boxes should be installed below the communications space and approved by the Avista Utilities Joint Use Administrator prior to installation (R2).



REFERENCES:

- 1. Refer to DO-1.431 for Joint Use on Air Switch Poles.
- 2. Refer to DO-1.449/DU-1.458/ESR for Joint Use New Riser Installations.

AVISTA Utilities Distribution Standards DU-1.460 ESR



1.21.6 Joint Use New Riser Installations

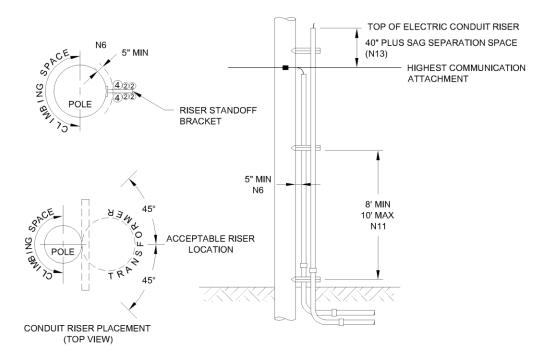


Figure 7 - Joint Use New Riser Installation

NOTES:

- 1. Risers are not allowed on air switch poles (R1).
- 2. Joint use risers are not allowed on substation riser poles.
- 3. New riser installations will require that all conduit risers on the pole be strapped to one set of standoff brackets, including electric conduits.
- Joint use companies are limited to one (1) 4-inch conduit per pole or two (2) 2-inch conduits per pole, unless otherwise approved by the Avista Utilities Joint Use Administrator.
- 5. Maximum total number of conduits for all companies, including Avista conduits, is four (4) 4-inch conduits on any pole. Two (2) 2-inch conduits may be counted as one (1) 4-inch conduit. No more than six conduit risers shall be placed on a set of standoff brackets. This is based on 15-inch standoff brackets. Longer standoffs for joint use require the prior approval of the Joint Use Administrator.



- 6. All risers must be mounted to provide a minimum five-inch clearance between the face of the pole and the riser closest to the pole.
- 7. If standoff brackets have electric conduits and need to be changed to longer brackets to accommodate additional communication conduit risers, then the change out of the brackets shall be done by Avista Utilities at the expense of the communication company. The electric conduits should be placed outside of the communication conduits whenever possible.
- 8. Small communication service drops may be secured directly to the pole. When more than two small service drops are involved, those communication service drops are required to be installed in conduit on standoffs and must be located on the equipment side of the pole and not infringe on the pole climbing space.
- Small service splice boxes are allowed near the bottom of the pole so long as they are located on the equipment side of the pole and do not infringe on the pole climbing space.
- Locate the standoff brackets and conduit riser on the equipment side of the pole opposite the climbing space. Avoid trapping communication lines between the riser and the pole.
- Maintain a minimum of eight feet (ten feet maximum) between the ground line or lowest standoff bracket and the next higher bracket.
- 12. Placement of standoff brackets and conduit risers should avoid vehicular traffic and not enter into a sidewalk or curb area.
- 13. A minimum clearance of 40-inches shall be maintained for safety space between the top of the electric conduit and the highest communication attachment.
- 14. When necessary, use split duct covering to wrap each individual conductor (1-inch, stock number 578-0280 and 2-inch, stock number 578-0282) for safety space clearances.
- 15. An 18-inch standoff bracket should be used if there is joint use on a 600 amp, three-phase primary riser (three (3) four-inch conduits). This may result in the distance between the face of the pole and the riser closest to the pole to be less than the five-inch minimum clearance, which will require prior approval by the Avista Utilities Joint Use Administrator.
- 16. Innerduct must not extend more than 4 inches beyond the top of the riser.



REFERENCES:

- 1. NESC 217A2c, Table 238-1.
- 2. Refer to DO-1.431 for Joint Use on Air Switch Poles.
- 3. Refer to DO-1.446 for Joint Use Vault Installations.
- Refer to DO-4.520 for Three Phase 900 Amp Loadbreak Air Switch with Steel Base
- Refer to DO-4.530 for Three Phase 900 Amp 15/25 kV Loadbreak Air Switch with Insulated Base AS.
- Refer to DO-4.540 for Three Phase 900 Amp 15/25 kV Air Switch Hookstick with Fiberglass Base AS90025HOG.
- 7. Refer to DU-7.520 for Secondary Risers.

AVISTA Utilities Distribution Standards DO-1.449/DU-1.458 ESR



1.22 CLEARANCE OF GAS METERS TO ELECTRIC METERS

Note: the below drawing is intended to show the required clearance between gas and electric meters at the same building. Do not use this drawing as a guide for installation or clearances for electric meters. See **Section 3.2.9**.

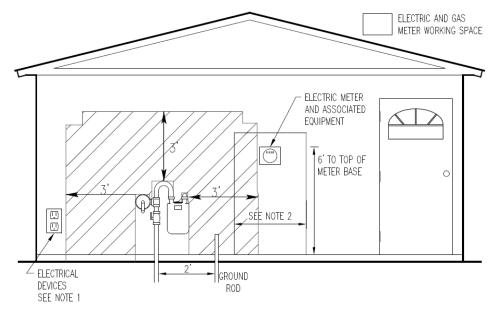


Figure 8 - Gas and Electric Meter Clearances

NOTES:

- Electrical components, devices, and equipment including switches, receptacles, light fixtures, disconnects, circuit breakers, pad mounted air conditioners or heat pumps that do not supply ventilation air, generators, and transformers should be at least 36" away from regulator vent.
- 2. Electric meter working space shall be the greater of 30" wide or the total width of the electric service and metering equipment, centered on the equipment, and a clear space of at least 36" in front and permit at least a 90 degree opening of equipment doors or hinged panels. No bollards are allowed in this space.
- 3. Any exceptions must be approved by gas engineering.



1.23 AVAILABLE FAULT CURRENT AT POINT OF DELIVERY

<u>Customer must provide service entrance equipment rated to interrupt the amount of fault current available</u>. Contact Distribution Engineering for information on available fault current at the service point and for information for arc flash study. Minimum main circuit breaker fault duty rating shall be 10,000 amperes for residential and 22,000 amperes minimum for multi-family and all commercial installations. Higher ratings may be required depending on transformer and service wire size and proximity to service entrance. Please reference maximum fault currents for frequently used transformers below.

Note: All construction temps require a minimum of 15 ft of #2 AL conductor between transformer and meter.

SINGLE PHASE TRANSFORMER FAULT CURRENT CALCULATIONS at (240V) WITH CONDUCTOR

(Important) When max. available fault current exceeds 10,000 amps the customer will be required to provide equipment that has an AIC rating that exceeds the max. available fault current.

Transformer KVA	Max Fault current at transformer	Conductor size ,length and fault current in amps		
15	5208	under 10,000 amps AIC needed with 4/0AL and smaller		
25	8013	under 10,000 amps AIC needed with 4/0AL and smaller		
37.5	11161	2AL @15ft =7413		
50	14881	2AL @15ft =8890 2/0AL @15ft =10915 4/0AL @15ft		
75	20833	2AL @15ft =10719 2/0AL @15ft =13809 4/0AL @15ft		
100	26042	2AL @15ft =11949 2/0AL @15ft =15920 4/0AL @15ft		
167	33135	2AL @15ft =13250 2/0AL @15ft =18317 4/0AL @15ft		

Note: This table is only for reference to help with residential/commercial services and single phase temporary service installations. If your application is not shown here, please call Avista Utilities.

Note: A permanent label with service equipment AIC rating must be affixed to outside of service equipment for all multi-family and commercial meter installations.

Table 3 – Single Phase Point of Delivery Available Fault Current




3-Phase Padmount Transformers					
Transformer KVA	Secondary Voltage	Max Fault Current (AMPS)	Transformer KVA	Secondary Voltage	Max Fault Current (AMPS)
45	208	8922	300	208	41637
45	480	3866	300	480	18043
75	208	14870	500	208	42058
75	480	6444	500	480	18225
112.5	208	22306	750	208	39280
112.5	480	9666	750	480	17021
150	208	27758	1000	208	52374
150	480	12028	1000	480	22695
225	208	41637	1500	480	34043
225	480	18043			

Table 4 – Three Phase Point of Delivery Available Fault Current



1.24 METER ENCLOSURE INSTALLATION IN FLOOD ZONES

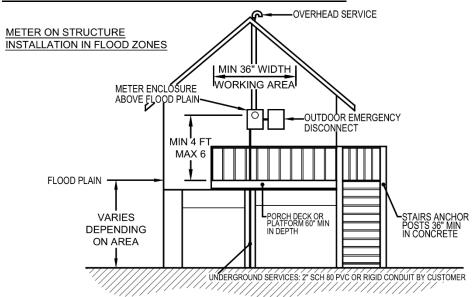

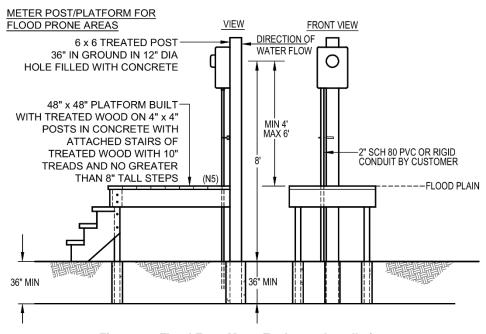


Figure 9 - Flood Zone Meter Enclosure Installation



NOTES:

- When elevation of the meter enclosure is required by the authority having jurisdiction, the permanent installation of deck/platform and stairs shall be installed and provided by customer prior to energizing the facility.
- Meter and conduit to face downstream when installed near flowing water such as rivers and streams.
- 3. Additional meter protection required in areas with possible log flows.
- 4. Stairs must be treated wood, no taller than 8" rise per step.
- 5. Guard rails needed if deck or platform 12" or higher, above grade.

REFERENCES:

- 1. NEC Article 682.2
- Overhead services must comply with Avista Overhead Construction standard DO-6,260/ESR.
- 3. NESC Article 112.C

AVISTA Utilities Distribution Standards DO-7.316/DU-9.134 ESR



1.25 POWER QUALITY

It is the customer's responsibility to meet industry power quality standards as recorded at the point of service with Avista and any alterations shall be at the customer's expense.

< 5% Total Harmonic Distortion at point of common coupling of voltage.

Reference: IEEE 519



2.0 TEMPORARY or CONSTRUCTION SERVICE

There is an installation fee for temporary service and additional charges for correction trips.

Each new house should have one duplex outlet available when temporary power is disconnected.

Temporary single phase service from a 120/208 three phase transformer or transformer bank requires a 5 terminal meter socket.

Temporary CT Enclosures are allowed on wood posted for a period of one year.

Connection point for overhead temporary service must be on the same side of building as the permanent service point.

Location of overhead temporary service point must be at least 15' away from source.

2.1 TEMPORARY OVERHEAD SERVICE

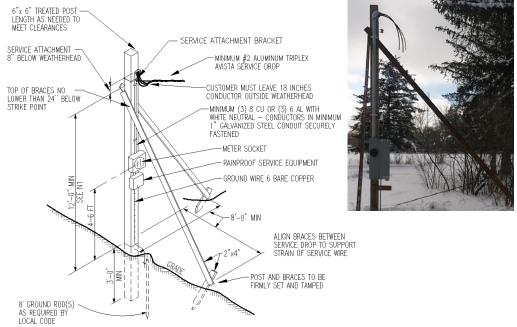



Figure 10 - Temporary Overhead Service

DIRECTIONS:

 The customer or their electrician must consult the local electrical code authority for specific requirements. An electrical inspection permit must be displayed on meter can before a service connection can be made.



- Contact the local Avista Utilities office before installation to request temporary service and to determine available voltage and location. Whenever possible the temporary service must be located within 125 feet of the nearest pole and as near as possible to the permanent service mast location.
- 3. The customer provides and installs all materials shown. Avista will install the service conductor and meter.
- 4. Temporary Service must be located on the same side of building as permanent service.
- 5. Customer must follow the rules for clearances. Reference figure below:

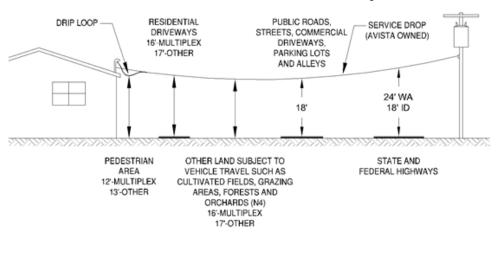

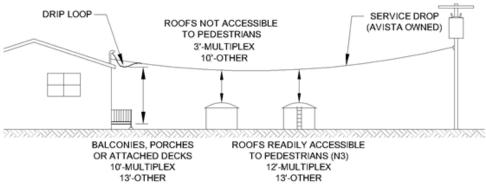


Figure 11 – Overhead Service Clearances over Ground and Buildings



NOTES:

- Location and height of post must allow service drop to meet service clearance in DO-6.210.
- The temporary service must be overhead when the permanent service is from an overhead transformer.
- 3. Temporary Service shall be at least 3 feet from all electric and gas service stubs.
- 4. Service mast must be a minimum of 15 feet, horizontally, away from the source.

REFERENCES:

- Refer to Electric Service Requirements section 1.23 for available fault current at Point of Delivery
- 2. Refer to DO-6.210 for Service Clearances

AVISTA Utilities Distribution Standards DO-6.250 ESR



2.2 TEMPORARY UNDERGROUND SERVICE

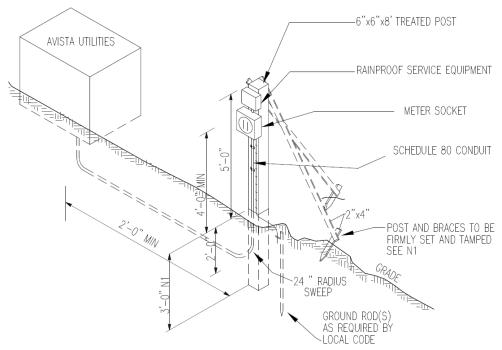


Figure 12- Temporary Underground Service

These are general Avista Utilities requirements. The customer or their electrician must consult the local electrical code authority for specific requirements. <u>An electrical</u> inspection permit must be displayed before a service connection can be made.

Contact the local Avista Utilities office before installation to request temporary service and to determine available voltage and location. The temporary service must be located to avoid interference with existing or future services.

The customer provides and installs all materials including the service conductor and 2" conduit. The service conductor must be long enough to reach the source plus 5 feet and be approved by Avista. Minimum of (3) 8 CU or (3) 6AL with white neutral; maximum conductor size is 1/0 AL. Below grade 2" conduit shall be schedule 40 PVC and schedule 80 PVC above grade. Avista does not allow conduit bodies between the service transformer and meter enclosure. The service conductor length must be long enough to be compliant with the AIC rating of their service equipment. This may require extra conductor to be coiled up and buried by the customer opposite the transformer side of the temp meter post. AIC rating and utility max. available fault current must be noted on outside of temp meter can.



Avista installs the meter and connects the service conductor to the source:

- If the post is between 2 and 5 feet from the source, Avista will dig and backfill the ditch.
- If the post is further than 5 feet from the source, the customer will dig and backfill
 the ditch. Backfill can not contain any rock larger than 4 inches. The customer is
 responsible for the costs required due to additional trench length.

NOTES:

- If the full 3 foot burial depth cannot be met or the backfill does not support the
 post adequately, then the post must be braced. Bracing for the post must be
 positioned away from the source.
- 2. The temporary service must be overhead when the permanent service is from an overhead transformer, even if the permanent service is to be fed underground.
- 3. Call 811 before digging to locate buried utilities.
- 4. Temp shall be at least 3 feet from all electric and gas service stubs.

REFERENCES:

 Refer to Electric Service Requirements section 1.22 for available fault current at point of delivery.

AVISTA Utilities Distribution Standards DU-9.140 ESR



3.0 RESIDENTIAL SERVICE REQUIREMENTS

For the purposes of this book, residential service is defined as an individual residence, apartment, mobile home or living unit used for domestic purposes.

Non-diversified continuous load cannot exceed 800 amps of true load for single phase service. For loads larger than 800 amps, a 120/208V or 277/480V 3 phase service is required. All service meters must be located on outside of building.

3.1 RESIDENTIAL SERVICE CUSTOMER CHECKLIST

OVERHEAD SERVICE

Avista has provided this checklist for the residential customer to assure that all customer work has been completed before Avista comes to connect the service.

Avista has agreed with the proposed location of service entrance and meter location. (i.e. meter location with meter 4' to 6' up from the ground (See Service Location).
A service agreement with Avista has been signed by customer and returned with payment.
An insulated strike knob on the mast or two-bolt strike plate on the house has been installed 8" below the weather head and 24" of extra wire has been left hanging out of the weather head for utility connection. Strike plate shall be installed on the source side of the service entrance mast. Neutral wire extending from weather head has been taped with white tape for identification.
Avista has approved the mast height. If the mast is 24" above the roof, or the distance from the building to the Avista pole exceeds 100', or the distance from the meter pole to the Avista pole exceeds 125', then a back guy on the mast or meter pole is required.
Treated 8"x8" wood permanent meter pole was approved by Avista for this application before it was installed and meets all requirements <u>and must be truck accessible</u> . Metal poles/structures are not allowed.
Residential services must have properly labeled outdoor emergency disconnect installed per NEC 230.85.
AIC rating of service equipment has been verified to be adequate to handle the available fault current from the supply transformer with the reduction due to the conductor size and length added into the total.
State or City Electrical Inspector has inspected and approved service entrance



UNDERGROUND SERVICE Avista has approved the proposed location of service entrance and meter location (See Service Location). A service agreement with Avista has been signed by customer and returned with payment. A locate request has been called into the National One Call center (#811) at least 2 business days before diaging is scheduled to begin. Location of transformer and ditch route has been approved by Avista prior to digging. Poly pulling string has been installed into conduit by customer and all conduit joints have been glued and proper sized sweeps have been installed on conduit ends (Section 1.21.4 of handbook) and all conduit that exits the ground is schedule 80. Ditch and conduit have been inspected by Avista for proper depth and placement of conduit including sand bedding (if needed) BEFORE backfilling ditch. Residential services must have properly labeled outdoor emergency disconnect installed per NEC 230.85.

△ AIC rating of service equipment has been verified to be adequate to handle the available fault current from the supply transformer with the reduction due to the

State or City Electrical Inspector has inspected and approved service entrance.

conductor size and length added into the total.



3.2 OVERHEAD SERVICE

3.2.1 Point of Delivery

The point of delivery for self-contained metering is at the ends of the service entrance conductor extending from the mast head. An extra 24" of wire must extend beyond weather head for utility connection and neutral wire must be taped in white tape or marked by factory stripe.

3.2.2 Service Mast

Service on the gable end of the house must have the meter and attachment point on the gable end. Meters on metal structures or on buildings with metal roofs, are to be placed on the gable end of the structure to protect them from ice and snow from the roof.

Avista will no longer attach to a customer provided steel "Dead Mast" or "Roof Horse". Other options will need to be considered when trying to lift an overhead service wire over a shop or garage. Contact your local Avista representative before construction.

Services on buildings without metal roofs not on the gable end of the house or building must be mast-type extending through the roof. Roof masts must be within 30" of the roof's edge. Services under the eaves of sloping roofs are only allowed by special permission and must meet all requirements for service and meter protection as well as meet all clearance requirements (services terminating under the eaves of metal roofs are not allowed anytime).

Masts extending through metal roofs must be protected from sliding snow & ice by back guying, mast with guy kit, strut or by building a "Roof Cricket (similar to a chimney cricket) above the mast with the minimum dimensions of 16" high by 24" wide by 28" deep.

There shall be no conduit bodies or junction boxes (condulets, LBs, etc.) between the customer-owned weatherhead and the Avista-owned meter. Field sweeps are permissible.

For flush-mount meter enclosures, rigid or intermediate metal conduit must be used between the Avista-owned meter and the customer-owned weatherhead. Service conductors are not allowed to traverse through any interior space apart from flush-mount meter applications.

Electric meters that are under the eaves of buildings with metal roofs must have protection from sliding snow & ice. Extended soffit must provide at least 18" of overhang to protect the meter. Metal roof snow brakes or mini roofs attached to the wall above the electric meter and cantilevered over the electric meter are not adequate protection.



Adequate protection consists of either:

- 1. A "Roof Cricket" (similar to a chimney cricket with a minimum dimension of 16" high by 24" wide by 28" deep) built just above the mast.
- 2. Extension of existing roof overhang to 36" by 48" wide over the electric meter to be built for local snow loading.
- 3. Small gable roof (not shed roof) 24" by 24", 8 inches above the electric meter attached to the wall and being supported at all 4 corners by 4"X4" commercially treated posts sunk into the ground 18" embedded in concrete.

Note: "Roof Cricket" is to be 24" wide to protect the meter below the roof and needs to be lagged through the roof sheathing and into a roof framing member. Service mast extending through roof shall not extend more than 6' above roof without preapproval by Avista representative.

Service mast must be a horizontal distance of 15' (minimum) from the source. This applies to both temporary and permanent overhead services.

Roof Cricket:

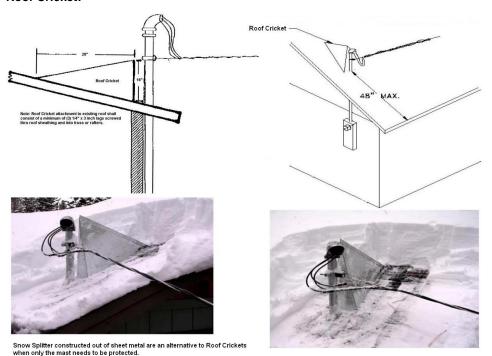


Figure 13 - Roof Cricket



3.2.3 Multiple Masts

Avista will connect the service entrance conductors from up to three masts and supply them with a single set of service drop conductors. <u>Group multiple masts together within no more than 24" of one another.</u> Extend service entrance conductor from each mast to a common point near the service drop attachment. Avista will normally make the connections between customer and utility conductors unless size and/or number of conductor prevent this. Check with Avista for approval.

3.2.4 Anchor Point

All service entrances must be located so that the utility service drop can be anchored to the building at only one point. These anchoring points must meet Avista strength and height requirements. The strength needed will depend on the service drop conductor size and number. Guying may be required on a roof mast used as the anchor point. Contact Avista for information.

Overhead service drops will be run and attached to the anchor point by Avista. The anchor point is furnished and installed by the customer or their electrician.

Service anchor brackets attached to service masts are preferred. Avista will <u>not</u> anchor to PVC or EMT conduit. <u>Avista will no longer attach to house knobs or chubs on new or altered construction</u>. (A strike plate with 2 or 4 lags is the recommended attachment point when not attaching to the mast).

3.2.5 Service Clearances

The anchor point must be located to provide the required clearances over buildings and ground. Clearances are shown later in this section are for reference only. Call Avista to determine design clearances based on service conductor size and length.



3.2.6 Overhead House Mast

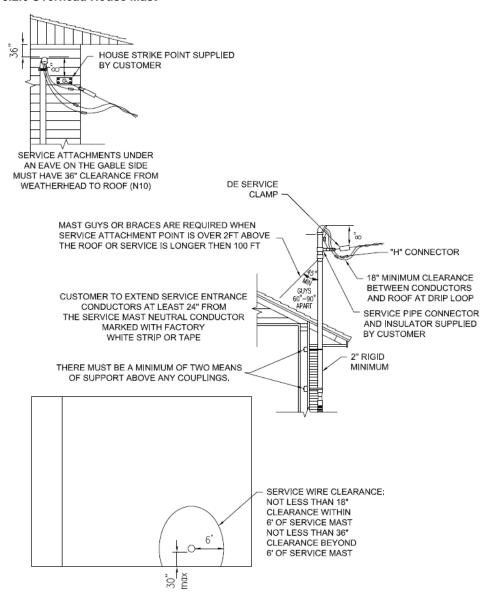


Figure 14 - Overhead House Mast



AVISTA SUPPLIED MATERIAL:

Overhead service conductor from transformer, "H" connectors to connect to customer service wire, and deadend service clamps to attach to mast.

CUSTOMER SUPPLIED MATERIAL:

Service wire, meter base, mast conduit, weatherhead, and attachment bracket with insulator. The attachment bracket can be mounted on the mast or building. Screw type attachment brackets (house knob or chub) are inadequate for modern services. They are no longer allowed for new or altered construction. A strike plate with 2 or 4 lag screws is recommended when not attaching to mast.

NOTES:

- Avista owned equipment must meet National Electric Safety Code. Avista Standard Practices may be more stringent than National Electrical Code and local requirements.
- 2. Avista can assist the customer in determining the service location, attachment height and metering equipment requirements. Call the local office number listed in the Electric Services Requirements Handbook early in the planning stage.
- Contact local inspectors for specific information regarding design of the service entrance.
- 4. The service entrance must be inspected by local authorities and approved by Avista before service conductors can be installed.
- 5. Avista does not allow couplings in the mast above the roofline.
- 6. Service drop and communication service drop shall have clearance of no less than 12 inches from each other at point of attachment on building being served.
- 7. Service mast must be a minimum of 15 feet, horizontally, away from the source.
- 8. Service attachments more than six feet above the roof must be truck accessible.
- 9. The service mast shall consist of a minimum 2-inch rigid steel conduit.

 Transitions from PVC to rigid conduit between the customer owned weatherhead and utility owned meter is prohibited.
- 10. If the service attachment is below the roof on the gable side of the house and there is no eave, the clearance from the customer owned weatherhead to the roof may be reduced to 18 inches.



REFERENCES:

- 1. WAC 296-46B-230
- 2. NESC 235C1 exception 3, 24.
- 3. Refer to DO-3.330 for clearances to buildings and other appurtenances.
- 4. Refer to DO-6.210 for service clearance.
- Refer to DO-6.270 (ESR Section 3.2.9) for OH service drop clearances to attached structure.
- Refer to DO-6.107 through DO-6.149 for service and secondary conductor tension and sag.

AVISTA Utilities Distribution Standards DO-6.230 ESR



3.2.7 Overhead to Overhead Service Pole

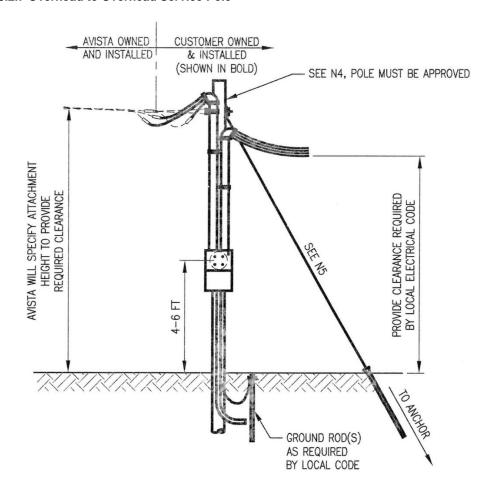


Figure 15 – Overhead to Overhead Service Pole

NOTES:

The customer provides and installs all equipment on the load side of Avista's
mast head connections; pole, ground electrode(s), mast conduit, weather head,
meter socket, service panel, entrance wires, service bracket (service attachment
point), and down guy if required.



- The customer must construct the service entrance per local code requirements and have it inspected by local authorities before Avista conductor can be installed. Permit and inspection sticker must be displayed.
- Contact Avista Customer Project Coordinator for help in determining service attachment height, pole locations and clearance from cable TV and telephone conductors. Avista must determine the service attachment point to meet required clearances
- 4. The service pole must be a class 5 (N8) or better new commercial butt treated Western Red Cedar or Full Pressure Treated pole or approved 8" x 8" post (N9). Set the pole to a depth of 2ft plus 10% of pole height or at least 6 ft. The pole must be plum. Class 5 pole or better is required if no truck access.
- 5/16" galvanized steel guy cable and approved anchor is required if the service drop is longer than 125 feet and/or if the span crosses other structures, or if required by Avista or the electrical inspector. Two to 1 slope required.
- Extend the service wire tails 24 inches or more from the weather head to allow for Avista's connections. The neutral wire shall be marked with a factory white stripe or white tape.
- Depending on the meter socket style, line and load side conduit may need reversal.
- 8. Class 5 dimensions:

Length of Pole (ft)	20	25	30	35	40	45	50
Minimum circumference at 6 ft from butt (in)	25.0	28.0	30.0	32.0	34.0	36.0	37.5

- 9. An 8"X8" square post can be used for a permanent overhead single phase residential service with the following stipulations:
 - a. Post is (non-laminated) full length commercially treated and has a length (before being installed into the ground) of no longer than 25ft and that the access to the post is bucket truck accessible.
 - Service wire being attached by Avista is no larger than a #2 triplex (1 run) and the span is 75 ft or less and it does not pass over a roadway (Passing over residential driveways is allowed if the driveway is not subject to large truck traffic: i.e. garbage truck)
 - c. An insulated strike plate or thru bolt with insulated clevis is installed 8 inches below the weather head for the attachment point. A house knob or "Chub" is no longer an approved attachment point.



- d. Post will be installed in a hole with a minimum of 12 inch diameter totally filled with concrete and will be to the depth of 4 ft for posts up to 20ft and 5 ft depth for poles from 20 ft 6 inch to 25 ft.
- e. Permission to use a post instead of a pole for each application has to be preapproved by the local Avista office before it is installed. (The post can and will be rejected by the Avista field representative if it is determined to be subpar in anyway: i.e. (large multiple knots in one location, deep surface rot, excessively twisted, large chunks missing or if the post begins to pull over under the required tension of the service wire upon connection or anytime thereafter.)

AVISTA Utilities Distribution Standards DO-6.260 ESR



3.2.8 Overhead to Underground Service Pole

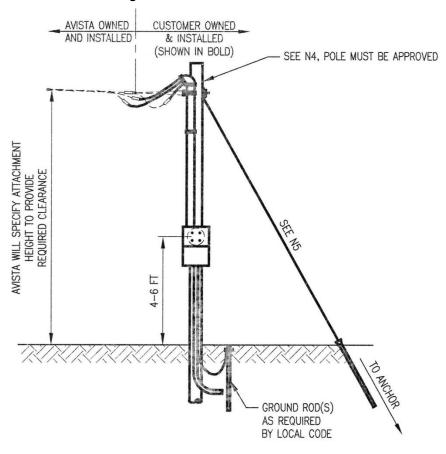


Figure 16 - Overhead to Underground Service Pole

NOTES:

- The customer provides and installs all equipment on the load side of Avista's
 mast head connections; pole, ground electrode(s), mast conduit, weather head,
 meter socket, service panel, entrance wires, service bracket (service attachment
 point), and down guy if required.
- The customer must construct the service entrance per local code requirements and have it inspected by local authorities before Avista Utilities conductor can be installed. Permit and inspection sticker must be displayed



- Contact Avista Customer Project Coordinators for help in determining service attachment height, pole locations and clearance from cable TV and telephone conductors. Avista must determine the service attachment point to meet required clearances.
- 4. The service pole must be a class 5 (N7) or better new commercial butt treated Western Red Cedar or Full Pressure Treated pole or 8"x8" treated post (N8). Set the pole to a depth of 2ft plus 10% of pole height or at least 5 ft. The pole must be plum. Class 5 pole or better is required if no truck access.
- 5/16" galvanized steel guy cable and approved anchor is required if the service drop is longer than 125 feet and/or if the span crosses other structures, or if required by Avista or the electrical inspector. Two to 1 slope required.
- 6. Extend the service wire tails 24 inches or more from the weather head to allow for Avista's connections. The neutral wire shall be marked with a factory white stripe or white tape.
- 7. Class 5 dimensions

Length of Pole (ft)	20	25	30	35	40	45	50
Minimum circumference at 6 ft from butt (in)	25.0	28.0	30.0	32.0	34.0	36.0	37.5

*Minimum circumference of top of pole 19 inches

- 8. An 8"X8" square post can be used for a permanent overhead single phase residential service with the following stipulations:
 - a. Post is (non-laminated) full length commercially treated and has a length (before being installed into the ground) of no longer than 25ft and that the access to the post is bucket truck accessible.
 - b. Service wire being attached by Avista Utilities is no larger than a #2 triplex (1 run) and the span is 75 ft or less and it does not pass over a roadway (Passing over residential driveways is allowed if the driveway is not subject to large truck traffic: i.e. garbage truck).
 - c. An insulated strike plate or thru bolt with insulated clevis is installed 8 inches below the weather head for the attachment point. A house knob or "Chub" is no longer an approved attachment point.
 - d. Post will be installed in a hole with a minimum of 12 inch diameter totally filled with concrete and will be to the depth of 4 ft for posts up to 20ft and 5 ft depth for poles from 20 ft 6 inch to 25 ft.



e. Permission to use a post instead of a pole for each application has to be preapproved by the local Avista office before it is installed. (The post can and will be rejected by the Avista field representative if it is determined to be subpar in anyway: i.e. (large multiple knots in one location, deep surface rot, excessively twisted, large chunks missing or if the post begins to pull over under the required tension of the service wire upon connection or anytime thereafter.)

REFERENCES:

- 1. Refer to DO-3.302 through DO-3.366 for Clearances.
- 2. Refer to DO-1.407 and DO-1.410 for Joint Use Clearances.
- 3. Refer to DO-6.210/ESR and ESR Section 3.2.11 for Service Clearances.
- Refer to ANSI 05.1 for Pole Classes.

AVISTA Utilities Distribution Standards DO-6.261 ESR



3.2.9 Overhead Service Clearances At Building

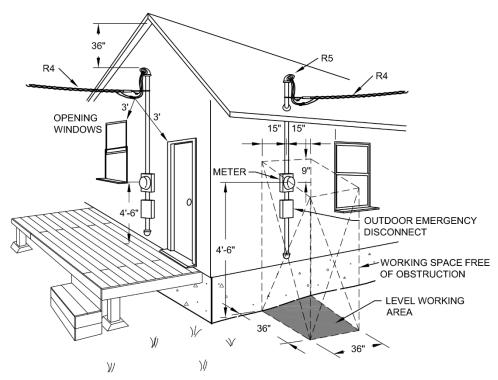


Figure 17 - Overhead Service Clearances at Building

NOTES:

- A roof, balcony, or area is considered readily accessible to pedestrians if it can be casually accessed through a doorway, ramp, window, stairway, or permanently mounted ladder by a person on foot who neither exerts extraordinary physical effort nor employs tools or devices to gain entry. A permanently mounted ladder is not considered a means of access if its bottom rung is 8 feet or more from the ground or other permanently installed accessible surface.
- These clearances to building openings apply to the closest point on the service drop, conductor, drip loop, or connectors. They do not apply to the meter.



- 3. Service attachment height must be such that these minimum building clearances as well as clearances above ground, driveways and streets can be met. Avista can assist the customer in determining the service mast height to meet these requirements. Call the local office number listed in the Electric Service Requirements Handbook early in the planning stage.
- 4. Services cannot be connected if service drop attachment height prevents required clearances from being met.
- 5. Conductors may be run above the top level of a window but shall be no less than 18" above window.
- 6. Meter sockets installed within 15 inches from center of meter to wall of structure (inside corner) will not be approved nor hooked up.

REFERENCES:

- NESC 234C3
- 2. NEC 230.9 Clearances on Buildings
- NEC 230.24 Clearances
- 4. Refer to DO-6.210 (ESR Section 3.2.11) Service Wire clearances.
- 5. Refer to DO-6.230 (ESR Section 3.2.6) for House Mast specifications.
- Refer to DO-6.107 through DO-6.149 for stringing sags and tensions of service conductors.
- 7. NESC Table 234-1 1(b)(1)

AVISTA Utilities Distribution Standards DO-6.270 ESR



3.2.10 Clearances to Buildings and Appurtenances






Figure 18 - Clearances to Buildings and Appurtenances

T = Transitional Area, treat as horizontal clearances

H = Horizontal

V = Vertical



	Voltage Phase to Ground or Phase to Phase					
	for Ungrounded Circuits 750 - 22 kV (ft)					
	0 to 7/	EO \/ (#\)	(35 KV requires greater			
	0 10 7	50 V (ft)				
Conductor Clearances	N. de alléan Laure	Dans Insulated as	clearances)			
Conductor Clearances	Multiplex,	Bare, Insulated or	Bare Conductor,			
	Neutral or Guys	Covered	Ungrounded Guys on			
	on Secondary	Conductor	Primary Poles			
	Poles					
	Attached to Bu					
	See DO-6.210					
H-dt-1	Adjacent to Bu	illaings				
Horizontal						
Clearances to walls, windows,	5	5.5 or	7.5 or			
balconies and areas readily		3.5+Blowout (N3)	4.5+Blowout (N3)			
accessible to pedestrians. (N5)		o.o · blowout (140)	4.5 - Blowdat (145)			
Vertical						
Over and under roofs or balconies	_					
not accessible to pedestrians (N5)	3	10	12.5			
,						
Over or under roofs or balconies						
accessible to pedestrians and	12	13	15			
vehicles under 8ft (N5)						
Accessible to truck traffic	16	17	20			
•	ent to Signs, Chimr	neys, or Billboards				
Horizontal						
Areas not accessible to Pedestrians	3.5	5.5 or	7.5 or			
A cas not accessible to redestrians	0.0	3.5+Blowout (R5)	4.5+Blowout (R5)			
Areas accessible to Pedestrians	5	5.5 or	7.5 or			
Areas accessible to redestriaris	"	3.5+Blowout (R5)	4.5+Blowout (R5)			
Vertical						
Over and under catwalks and other	11.0 (for Neutral)					
surfaces where people walk	or 12*	13	15			
surfaces where people walk						
Over or under other portions	3.5	6	8			
Antennas (R2)						
Horizontal						
Structure below line height	5	5.5 or	7.5 or			
oraciale below line neight		3.5+Blowout (R5)	4.5+Blowout (R5)			
Structure above line height (R2)	Structure	Structure	Structure Height+10ft			
Structure above line neight (R2)	Structure neight Fibit					
Structure Structure						
Structure above line height (R2)	Height+10ft	Height+10ft	Structure Height+10ft			
	neight full	neight full				
Vertical	5	5.5	7.5			
*Multiplex covered condu-	ctors.	'	'			
Working Clearances						

Note: Customer is responsible for any costs associated with rework necessary to achieve clearance.

Table 5 - Clearances to Buildings and Appurtenances



Radial Clearances

10' Min., 20' Min for Cranes

NOTES:

- For conductors above surfaces provided the vertical clearances above based on final unloaded sag at +176 degrees F (R4).
- 2. For conductors below projections use the initial unloaded sag at -20 degrees F (R3).
- 3. Check with local fire departments for ladder space clearances.
- Clearances are code requirements or Avista Utilities Standard Practices.
 Clearances less than those listed or higher voltages must be approved by the Avista Utilities Engineering Department.
- 5. A roof, balcony, or area is considered readily accessible to pedestrians if it can be casually accessed through a doorway, ramp, window, stairway, or permanently mounted ladder by a person on foot who neither exerts extraordinary physical effort nor employs tools or devices to gain entry. A permanently mounted ladder is not considered a means of access if its bottom rung is 8 ft or more from the ground or other permanently installed accessible surface.
- 6. The transitional areas marked "T" in the above drawings should be treated as horizontal clearance area.


REFERENCES:

- 1. NESC 234.
- 2. WAC 296 155 459(1)(d).
- 3. Refer to Section DO-3.2 for Sag.
- 4. Refer to DO-3.270 for Final Vertical Sag at 176 Degrees F.
- 5. Refer to DO-3.302 for Blowout (In Feet).
- 6. Refer to DO-6.270/ESR for OH Service Drop Clearance to Attached Structure.
- Refer to DO-3.334 for Other Structures.
- 8. Refer to Section DO-6.1 for Conductors.
- Refer to DO-6.149 for Services and Secondary Final Vertical Sag 176 Degrees F.

AVISTA Utilities Distribution Standards DO-3.330 ESR



3.2.11 Overhead Service Clearances Over Ground and Buildings

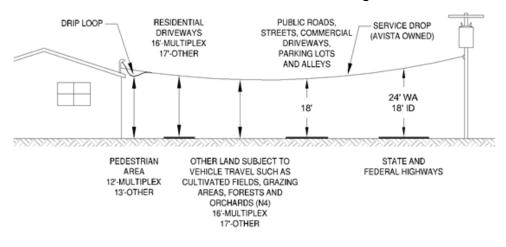

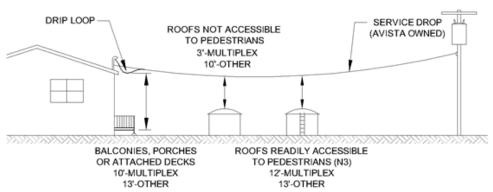


Figure 19 – Overhead Service Clearances over Ground and Buildings DIRECTIONS:

1. Provide the clearances shown using the final sag listed in DO-6.149.

NOTES:

- Clearances are code or Avista Utilities Standard Practices. Clearances less than those listed or for higher voltages must be approved by the Avista Utilities Engineering Department.
- 2. Trees cannot be used to support service conductor.
- A roof, balcony, or area is considered readily accessible to pedestrians if it can be casually accessed through a doorway, ramp, window, stairway, or permanently mounted ladder by a person on foot who neither exerts extraordinary physical effort nor employs tools or devices to gain entry. A



permanently mounted ladder is not considered a means of access if its bottom rung is 8 ft or more from the ground or other permanently installed accessible surface.

- 4. In areas subject to combine harvesting increase clearances to 20 ft when possible.
- 5. Altered services will require the customer to change clearances (as needed) to meet Avista's current clearance requirements.

REFERENCES:

- 1. NESC 232
- 2. NESC 234

AVISTA Utilities Distribution Standards DO-6,210 ESR



3.2.12 Clearances Around Swimming Pools and Hot Tubs

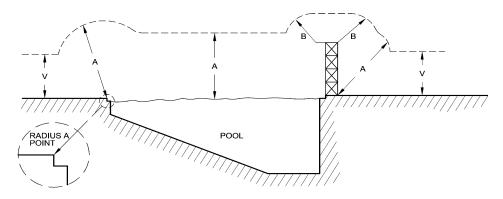


Figure 20 – Clearances Around Swimming Pools and Hot Tubs

		PHASE TO GROUND VOLTAGE			
		Grounded Guys & Grounded Neutrals	Multiplex 0 - 750V	Bare Wire 0 - 15kV	Bare 15 - 50kV
	Horizontal limit for overhead clearances from inside wall of pool	10.0 ft	10.0 ft	10.0 ft	10.0 ft
A	Clearances in any direction from the edge of pool, water level or base of the diving platform	22.0 ft	22.5 ft	25.0 ft	27.0 ft
В	Clearance in any direction from the diving platform or tower	14.0 ft	14.5 ft	17.0 ft	18.0 ft
v	Vertical clearance over adjacent land	See DO-3.314			

Table 6 – Clearances Around Swimming Pools and Hot Tubs



NOTES:

- 1. Conductors over a pool or hot tub are not recommended.
- 2. Wires and conductors within the distance A of the edge of a swimming pool must meet the clearance requirements above.
- 3. Wading pools must meet the requirements of pool.
- Hot tubs and therapeutic pools (near residence) must meet the requirements of DO-3.330.

Provide the minimum vertical clearances above based on the final unloaded sag at 176 degrees F as listed in DO-3.270. N5. Add the blowout displacement listed in DO-3.302 to meet the horizontal and directional clearances above.

REFERENCES:

- 1. NESC 234E1(Table 234-3), 351C1.
- 2. NEC 680-8.
- 3. Refer to DU-4.222/ESR for Clearances to Other Equipment, Buildings and Swimming Pools.
- 4. Refer to DO-3.314 for Vertical Clearance to Ground & Roadway.
- 5. Refer to DO-3.270 for Final Vertical Sag 176 Degrees F.
- 6. Refer to DO-3.302 for Blowout.
- 7. Refer to DO-3.330 Clearances to Buildings and Appurtenances.

AVISTA Utilities Distribution Standards DO-3.338 ESR



3.3 UNDERGROUND SERVICES

3.3.1 Point of Delivery

There shall be no conduit bodies or junction boxes (condulets, LBs, etc.) upstream of the Avista-owned meter equipment.

Self-Contained Meters

Avista will terminate utility service conductors in the customer supplied meter socket.

Current Transformer (CT) Meters

Avista will terminate utility service conductors on the utility side of the point of interconnection. Customer to provide mounting brackets and landing lugs.

Self-Contained Meter Modules

2 - 6 Units:

Avista will terminate utility service conductors on the bus of a 2 to 6 meter modules.

More than 6 Units:

Avista will terminate utility service conductors at the main disconnect feeding several multiple meter modules.



3.3.2 Service Ditch

The ditch route, width and the need for sand padding and bedding must be preapproved by the Avista Customer Project Coordinator.

All ditching must be inspected and approved by Avista personnel prior to backfilling and crew scheduling. Conductor will not be energized until the ditch has been fully backfilled. All ditches must be in accordance with Avista design requirements. Truck access is desirable. Time and material charges may result from additional trips necessary for energizing or correction of facilities.

Customer is responsible for backfilling and returning landscape back to required condition, haul-off, and all compaction requirements, including select backfill if required. Customer is also responsible for obtaining all required permits.

State law requires all excavators to notify "One-Call" 48 hours in advance so that all utilities may locate and mark buried facilities before trenching begins. The law requires that the ditch be hand-dug within 2 feet of a locate mark. Extreme caution should be used. All hand-digging must be completed prior to inspection by Avista.

Customer dug ditches shall end no closer than 2 feet to an in service, energized padmount transformer or junction enclosure and or no closer than 6 inches to an in service, energized secondary handhole or pedistal. Allow more distance if soil conditions cause ditch to cave in. Extreme caution should be used. The conduit must be installed to the end of the ditch and the sweep left unattached for Avista crews to complete.

Ditches for service from an overhead facility shall be dug from the base of the pole to a point designated by the Avista Customer Project Coordinator.

Ditch must be in relation to final grade within 2"- 4", including all drainage areas.



CALL BEFORE YOU DIG





3.3.3 Service Ditch Detail

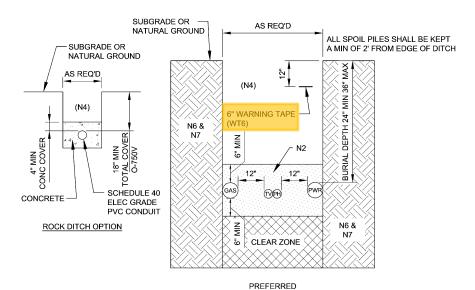


Figure 21 - Service Ditch Detail

BURIAL DEPTH <u>IN INCHES</u>			
VOLTAGE	IN CONDUIT		
VOLTAGE	MIN	MAX	
0 to 600 V	24	36	
601 to 35kV	36	48	

Table 7 - Burial Depths for URD Cable



NOTES:

- Gas service pipe and electric conduit should not be run in the water ditch. Avista requires 5' separation between water mains and electric cable. Refer to DU-1.410.
- Bedding and padding for services in conduit shall be classified as select backfill. Select backfill is clean, screened material consisting of 3/4" minus rock and sand free of rubbish, cinders, chemical refuse or other materials that could cause damage to the conduit.
- 3. All customer ditches must pass Avista Utilities inspection.
- 4. Approved backfill shall not contain any rock larger than 4 inches.
- 5. Electric and communication cables may be installed with less than 12 inches separation when the general joint use requirements and the requirements of this standard are met. All parties with less than 12 inches separation must agree to random lay. Refer to DU-1.420.
- All cables must have at least 12 inches radial separation from URD structures such as natural gas lines, fuel lines, building foundations, other cables not in random lay, etc.
- Gas services should be installed with a 5' minimum longitudinal separation from sewer utility pipelines or storm drains or at further distances as specified by the appropriate regulating agency.

REFERENCES: (Contact Avista)

- NESC Section 35.
- 2. Refer to DU-1.410 for Joint Use General Requirements
- 3. Refer to DU-1.420 for Joint Use Random Lay.
- 4. Refer to DU-7.450 for Service Cable Ditch.
- 5. Refer to Gas Standard Trenching and Backfilling 3.15.
- 6. Refer to Electric Service and Meter Requirements.

AVISTA Utilities Distribution Standards DU-1.430/DU-7.450 ESR



3.3.4 Clearance to Transformers

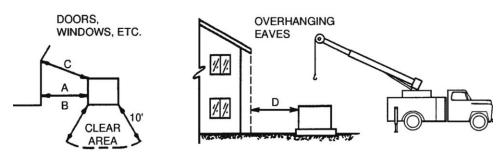


Figure 22 - Clearance to Transformers

NOTES:

- 1. The locations of the pad, transformer, and the point of delivery shall be as specified by Avista Utilities prior to the start of site preparation and construction.
- 2. The transformer shall be located to provide the following clearances. For the purpose of compliance with this standard, FR3 fluid is considered flammable and necessitates the same clearances as conventional oil filled transformers.

CLEARANCE TO:	SHALL BE NO LESS THAN:
Noncombustible Wall (N7)	2'
Wall with combustible component (N7)	8'
Doors, windows, or other openings	8'
Combustible eaves, decks, or patio roofs 14 f less above grade (N7)	8' horizontal from eave, deck, or roof
Other vertical obstructions	Boom truck Access Required
Gas Meter	3'
Propane Tank	Refer to Section 3.3.5



- 3.. Boom truck access must be provided.
- 4. The front of the transformer shall open away from the building. An area clear of all obstructions including landscaping must be provided for a radius of 10 feet from the front of the transformer, to provide personnel access for the operation and maintenance of the transformer. The grade of the ground in the clear area should approximately match that of the transformer. In addition, the grade of the ground at the pad-mounted transformer shall be such that any oil leaking from the transformer will flow away from the building.
- 5. <u>Transformers shall not be covered, concealed, disguised, or enclosed.</u> Where fences are permitted, they must be at least two (2) feet from the transformer on all sides (or more if required to allow the doors to open fully), must allow unrestricted access to the front, and must meet the clearance requirements listed above.
- Pedestal and meter cabinets shall not be in front of or obstruct the transformer doors. The minimum distance from the edge of the three phase transformer pad to the meter is 1 foot (R6, R7).
- 7. Noncombustible walls shall be constructed with a minimum 3-hour fire resistance rating and comprise of either a minimum of 6 inch thick reinforced concrete or 8 inch thick Concrete Masonry Unit (CMU) with all cavities filled with reinforced concrete.
- 8. The pad shall be located and sized to permit the required clearances. No part of the transformer shall extend beyond the outer edge of the pad. (See R7, DU-5.122, for concrete pad dimensions and construction details).
- 9. Phone and TV pedestals must not be in front of the transformer and must be at least 2' away from sides and back of transformer.

REFERENCES:

- 1. WAC 296-46B-450.
- 2. WAC 296-24-95703.
- 3. International Building Code Ch. 6 & 7
- 4. Distribution Engineering FR3 Policy and Cold Weather Documents.
- 5. Refer to DU-4.222 for clearances to Propane Tanks and equipment
- For metering cabinet and cans, see Electric Service and Metering Requirements Book.
- Refer to DU-5.122 Concrete Pads Three-Phase Transformers.
- 8. Landscape Screening for Pad-mounted Transformers booklet.
- Refer to DU-4.234 Bollard Equipment Protection for transformer protection in traffic areas.

AVISTA Utilities Distribution Standards DU-5.020 ESR



3.3.5 Clearance to Other Equipment Buildings & Swimming Pools SCOPE:

This standard provides direction for establishing clearances to existing buildings and other equipment when installing underground distribution cables and equipment.

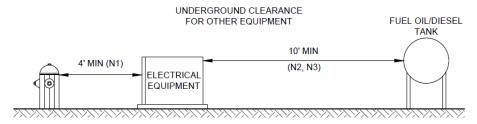


Figure 23 - Clearances Between Hydrants and Fuel Oil, Diesel, or Gasoline Tanks

Propane Tank Capacity (gallons of water)	Minimum Distance to Buried Tank (ft)	Minimum Distance to Above-Ground Tank (ft)
< 501	15	15
501 - 2000	15	25
2001 - 30,000	50	50
30,001 or more	50	Contact Distribution Engineering

Table 8 - Clearance: Propane Storage Tanks and Electrical Equipment

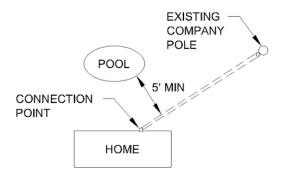


Figure 24 – Underground Clearance for Swimming Pools

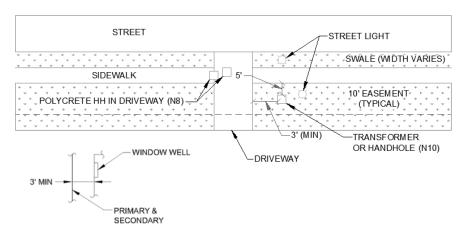


Figure 25 – Underground Clearances for New Developments

NOTES:

- Transformers and secondary pedestals shall have a minimum of 4' clearance from fire hydrants to facilitate water maintenance and fire department operations. Secondary handholes may be substituted where 4' minimum clearance is not attainable.
- 2. Clearance to fuel tanks (shown in Figure 1) is <u>ONLY</u> applicable for tanks containing fuel oil, diesel or gasoline.
 - Required clearances to Propane tanks are defined in Table 8; propane tank capacity **MUST** be confirmed before construction begins.
- If <u>any</u> Propane handling facility other than a tank is involved, or if the electrical distribution equipment is downhill from the propane equipment, contact Distribution Engineering.



- 4. Electric Distribution Equipment located within 15 feet of a propane tank must be rated as explosion proof (R2). See Distribution Engineering.
- 5. Cables may not be installed under above-ground pools.
- 6. Refer to Joint Use section for clearances to other underground utilities. (R9)
- 7. Maintain 5' minimum distance between water main and electric.
- 8. Use polycrete handholes for installation in driveways or areas where vehicles may drive over. (R7)
- 9. Avista Utilities will not install underground primary or service wire under any portion of a building. (R1, R4)
- Location of pad mount transformers or junction enclosures near roadways shall be in accordance with DU-4.206 (R5).

REFERENCES:

- 1. NESC 351C1 & 351C2
- 2. NEC 500.5(2); 500.6(4); NEC 500.7(A)
- 3. Liquefied Petroleum Gas Guide NFPA 58, 2004; Sections 6.3, 6.20.2
- 4. Refer to Avista Utilities Electric Service Requirements book.
- 5. Refer to DU-4.206 for Control Zone Streets and Hydrants.
- 6. Refer to DU-5.020 for Transformer Clearances
- 7. Refer to DU-7.325 for Traffic Rated Handholes
- 8. Refer to DO-3.338 for Swimming Pools
- 9. Refer to Section DU-1.4 for Joint Use
- 10. WAC 296-307-41047 Liquid Petroleum Gas Installations

AVISTA Utilities Distribution Standards DU-4.222 ESR



3.3.6 Residential Underground Service

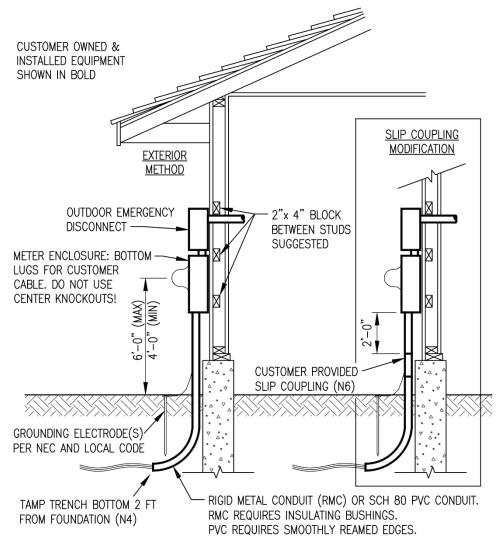


Figure 26 – Residential Underground Exterior Service

These are general Avista Utilities requirements. The customer or their electrician must consult the local electrical code authority for specific requirements. <u>An electrical inspection permit decal must be displayed on meter can before a service connection can be made</u>.



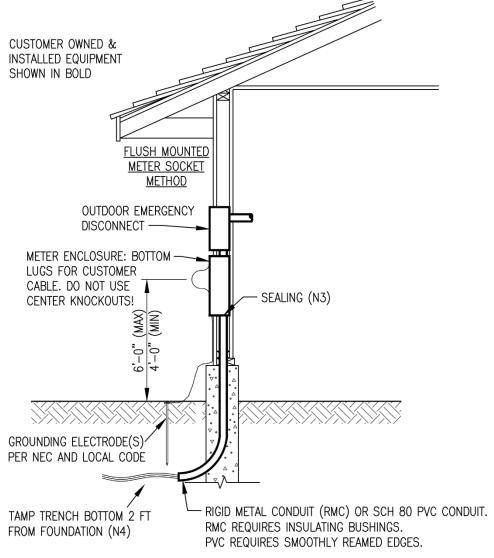


Figure 27 - Residential Underground Exterior Service, Recessed

NOTES:

- The company will pull service conductor into flush or recessed mounted 200 or 400 amp meter sockets. The socket must be rated for underground services.
- 2. Use only the off-center knockouts in the bottom of the meter socket. Applies to 200 and 400 amp cans.



- Avista to seal the source side conduit in recessed mounted meter bases. Use
 Fire Barrier Water Tight Sealant stock number 668-0600 with Fire Barrier
 Packing Material stock number 668-0601 if needed.
- 4. Tamping required to prevent the conduit from pulling out of meter base.
- Meter must be mounted on gable end of home or shop/garage having a metal roof or must have the same protection spelled out in section 3.2.2 of Electric Service Requirements Handbook.
- Customer to provide expansion coupling as needed and when required by local
 office. <u>Conductors cannot connect to the bottom of the meter base where
 expansion couplings are used.</u>
- Install adequate slack in service conductors to compensate for possible settling or shifts in coupling.
- 8. Exposed conduit <u>including sweeps</u> must be schedule 80 PVC or rigid metallic conduit (RMC).

REFERENCES:

1. See DU-7.450 for ditching requirements.

AVISTA Utilities Distribution Standards DU-9.130 ESR



3.3.7 Underground Service Pedestal

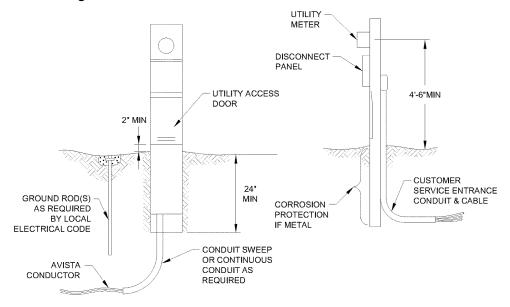


Figure 28 – Underground Service Pedestal

These are general Avista Utilities requirements. The customer or their electrician must consult the local electrical code authority for specific requirements. <u>An electrical inspection</u> permit decal must be displayed before a service connection can be made.

AVISTA SUPPLIED MATERIAL:

Meter and utility service wire.

CUSTOMER SUPPLIED MATERIAL:

- Direct Burried metal or UV stabilized fiberglass or plastic meter base and pedestal
- Utility service trench, backfill, and conduit as required by Avista
- Ground electrode(s), connectors and bonding wire
- Conduit and wire as necessary to serve the home
- Conduit sweep or continuous conduit as required



Meter Pedestal Requirements

- 1. 200 amp meter base
- 2. Corrosion protection on the buried section of metal pedestals
- 3. Meter sealing ring
- 4. Ventilation
- The utility service cable pull and terminating section shall be lockable, and restricted to Avista use only. This area must be kept clear for maintenance access.
- 6. Unmetered wire between Avista connections and top side of meter base must remain accessible only to Avista.
- 7. Corrosion inhibitor on aluminum connections
- 8. Plumb installation with the meter facing away if located within 5 feet of the structure.
- Pedestal must not be located under drip eave of building or where sliding snow can impact pedestal.

REFERENCES:

1. See DU-7.450 for ditching requirements.

AVISTA Utilities Distribution Standards DU-9.131 ESR



3.3.8 Pipe/Post Type Meter Pedestal

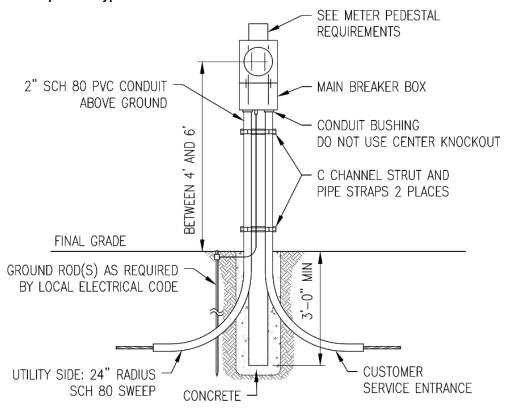


Figure 29 – 200 A Post Type Meter Pedestal Installation

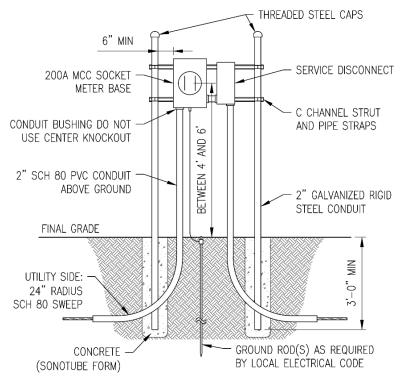


Figure 30 – 200 A Pipe Meter Pedestal Installation



Figure 31 - 200 A Pipe Meter Pedestal Install Photo



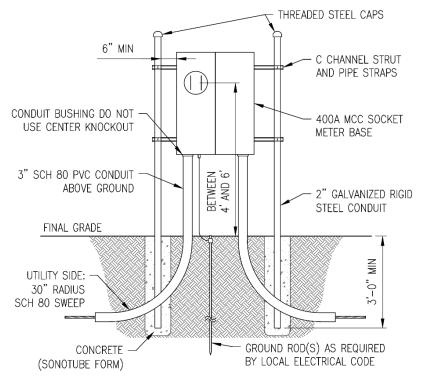


Figure 32 - 400 A Pipe Meter Pedestal Installation



Figure 33 - 400 A Pipe Meter Pedestal Install Photo



NOTES:

- Note: Underground service pedestals are the preferred method of construction. 1. See Section 3.3.7.
- 2. These are general Avista Utilities requirements. The customer or their electrician must consult the local electrical code authority for specific requirements. An electrical inspection permit decal must be displayed on the Meter Socket before a service connection can be made.
- Customer to furnish and install post in concrete or unistrut attached to two 2 inch rigid steel pipes (with threaded steel caps) embedded in concrete.
- Customer to furnish and install Meter / disconnect enclosure and sealing ring. Enclosures shall be securely mounted (minimum 2 points) without flex or wobble.
- 5. Customer to furnish and install Utility service trench, backfill, and conduit.
- Customer to furnish and install ground electrode(s), connectors and bonding 6. wire.
- 7. Customer to furnish and install conduit and wire as necessary to serve the home.
- 8. Avista Utilities to furnish and install meter and utility service wire.
- 9. Pedestal must not be located under drip eave of building or where sliding snow could impact pedestal.
- 10. The 200A meter pedestal must be a commercially new 6" x 6" treated post, minimum 8" top diameter butt treated cedar or full treated white wood pole, or two pipe unistrut. Refer to figures 29, 30, and 31.
- 11. The 400A meter pedestal must be two pipe and unistrut configuration. Refer to figures 32 and 33
- 12. Meter pedestal must be installed so the utility service cable pull and terminating section shall be lockable, and restricted to Avista use only.
- Meter pedestal must have corrosion inhibitor on aluminum connections.
- 14. Meter pedestal must be kept clear for maintenance access.
- 15. Meter pedestal must have plumb installation with the meter facing away if located within 5 feet of the structure.

REFERENCES:

Refer to DU-7.450 for Joint Use Service Ditch Detail.

AVISTA Utilities Distribution Standards DU-9.132 ESR



3.3.9 Pedestal Mounted Meter Enclosure - For Dedicated Transformer

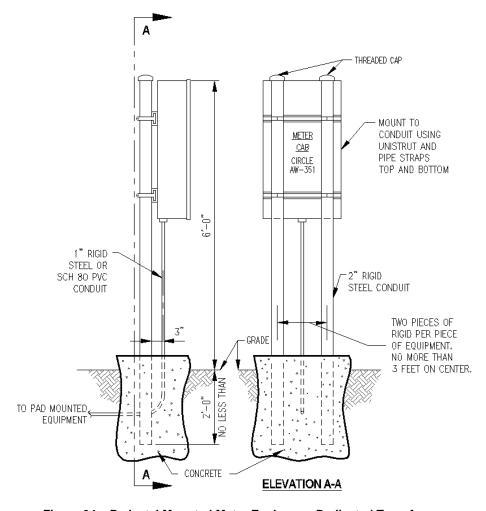


Figure 34 – Pedestal Mounted Meter Enclosure, Dedicated Transformer

Note: Self-standing gear must be supported by 2" rigid metal conduit at intervals of no more than 3'.

AVISTA Utilities Distribution Standards DU-9.215 ESR



3.3.10 Conduit Entrance Single-Phase Transformer

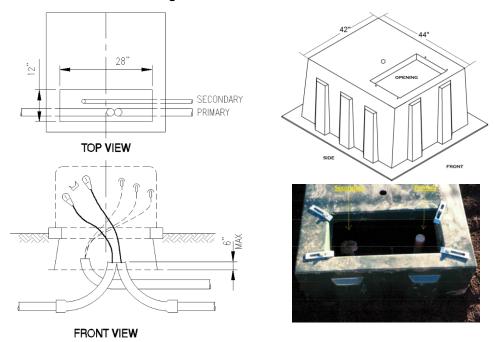


Figure 35 - Conduit Entrance Single-Phase Transformer

NOTES:

- 1. Backfill trench for 8 to 10 feet, one foot deep, on all sides of enclosure to anchor primary conduit (R6).
- 2. Seal unused conduits with plastic caps.
- 3. Other conduit arrangements may be required depending on the situation.
- 4. Spare conduits stubbed into ground sleeve shall be located to the front of the window.
- 5. Customer will excavate a hole for the transformer ground sleeve that is 3 feet deep and 8 feet by 8 feet square with approved bedding sand and within 3 feet of excavation.

REFERENCES:

- NESC 321B.
- NESC 360B.
- NESC 361A.
- NESC 363A.
- 5. Refer to DU-3.202 and DU-3.212 for junction enclosures.
- 6. Primary Ditching DU-4.605

AVISTA Utilities Distribution Standards DU-4.750 ESR



3.3.11 Conduit Entrance 1&2-Phase Padmounted Junction Enclosures

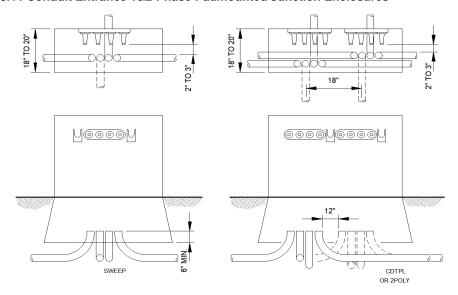


Figure 36 - Conduit Entrance for 1 and 2 Phase Padmounted Junction Enclosures

NOTES:

- To protect the cables and maintain bending radius greater than allowed minimums, sweeps are required for cable in conduit installations; sweeps are not required for direct buried primary cable installations. Conduit sweeps may need to be cut off to provide additional cable movement; if the conduit is cut off, leave at least 6 inches of conduit above the bottom of the ground sleeve.
- 2. Seal unused conduits with plastic conduit caps.
- 3. Other conduit arrangements may be required depending on the situation.

REFERENCES:

- NESC 321B
- NESC 360B
- 3. NESC 361A
- NESC 363A
- 5. Refer to DU-3.202 and DU-3.212 for junction enclosures.

AVISTA Utilities Distribution Standards DU-4.751 ESR



4.0 METERING REQUIREMENTS

4.1 GENERAL

- 1. Only Avista owned metering equipment will be used to provide billing information.
- 2. The customer must provide Avista with access for meter reading, maintenance, installation or removal per WAC 480-100-168.
- Consideration shall be given to the safety of Avista employees who must install, test, and read the meters on a regular basis.
- 4. Work Space shall be provided around the metering equipment and kept clear at all times. Minimum space shall be 15" on both sides of the meter down to grade. Minimum frontal clearance is 36" per National Electric Code.
- 5. CPC Note: Meter shop shall install 3 or more meters on multi-meter service point.
- 6. All meters and Avista equipment must be protected from ice and water damage (see Section 1.16).
- 7. For underground service installation, use side-bottom knockouts of meter enclosure (do not use center-bottom knockouts).
- 8. Avista strictly prohibits the installation of customer owned meter collars of any kind, including but not limited to meter socket transfer switches (GenerLink, et al.), and surge arrestor/protectors (Leviton 50240-MSA, et al.). Avista's engineers do not feel that such installations meet our high standard for customer safety because Avista does not inspect, test, or maintain customer owned equipment and neither the customer nor the fire department would be able to remove or isolate meter collars in the event that the device fails or catches fire.

4.1.1 Listing

All meter sockets, enclosures shall be listed by a qualified electrical testing laboratory acceptable to the jurisdiction having the authority.

4.1.2 Location

Metering equipment locations are subject to the following; Exceptions must be approved through the Avista Meter Department.

- The meter must be located as close as practical to the delivery point, generally within 10' of the front corner of the building or attached to the front of the house.
 For new construction, please coordinate meter location with CPC.
- 2. Located on the line side of the service disconnect (Hot sequence).
- 3. Each customer premise will be supplied through a single meter.
- At a multi-meter service point, meters will be grouped at one location with all meters located as closely as practical to the service point (within 25 feet of each other).
- 5. Meters must be grouped together and installed at the service equipment and not separated by walls or partitions.



- 6. Located outdoors or in approved meter rooms with permission from the Avista Electric Meter Department. No metering equipment shall be installed at a service switch located in an inaccessible place such as a manhole or in a vault.
- 7. Non-diversified continuous load grow operations over 200 continuous amps must have service meters located outside of building.
- 8. Readily accessible, free from vibration, corrosive atmosphere, abnormal temperatures, and well lighted per WAC-480-100-308
- 9. Whenever the customer makes additions, or changes that encloses the meter and prevents access they may be required to relocate the metering equipment, at their expense, to meet Avista's specifications.
- Meters must be protected from ice and water off roofs, damage from doors and materials and vehicular traffic.
- No Avista meters are allowed downstream of customer equipment such as dry transformers.
- 12. Meters in backyards (opposite roadway) where address is not visible must have address labelled on meter can with weatherproof decal.

4.1.3 Meter Room Requirements

- 1. Must meet all electrical and mechanical code requirements.
- Meters must be grouped together in the same room. Not separated by walls or partitions.
- Located on the ground floor with exterior doors opening outward with direct access to meters. Exceptions require prior approval through Avista Electric Meter Shop.
- 4. The exterior door shall be equipped with a panic bar.
- If locked, the customer will provide a key for an Avista installed lock box. 24 hour access to room required via lock box key, controller or keypad code. 24 hour call number is not sufficient to meet this requirement of physical access.
- Area must be well lit and not used for storage.
- 7. 3 ft. working clearance is required in front of each meter and 15" on both sides of meter enclosures.



- 8. Avista will no longer run secondary conductors into customer's commercial or multi residence building through the wall or up through the slab. Going forward the "Point of Delivery" will be in an outside wall mounted Pulling/termination enclosure or a standalone Pulling/termination enclosure away from the building wall installed on (2) 2 inch rigid steel pipe embedded in concrete with unistrut for attachment points as needed.
- If direct customer access (tenant) is not available an NCC Bypass is required for all service points not directly accessible.
- 10. Provisions to facilitate remote meter reads including the following requirements:
 - A dedicated 15 amp (circuit) power source in the meter room ceiling to be mounted within 2 feet of the interior enclosure.
 - b) An interior 6" x 6" x 4" deep enclosure, minimum (box) for a signal amplifier and coaxial connection to be provided.
 - Signal amplifier (if necessary) will be powered by the 15 amp circuit referenced above.
 - d) Interior enclosure (box) shall be mounted to the meter room ceiling, centrally located midway between meters spread and a minimum of 2' away from the front face of the nearest meter surface.
 - e) Interior enclosure not to exceed 3' higher elevation then highest meter mounting position. For high meter room ceilings this distance can be increased, with an increased in item 4 above with a 1:1 ratio.
 - f) A 1" conduit shall be provided that runs from the interior enclose to the exterior enclosure that penetrates the structure to the exterior of the building.
 - g) Total conduit length not to exceed 100 feet.
 - h) A 6" x 6" x 4" deep minimum weatherproof surface mounted enclosure (box) shall be attached to the exterior of the building. The enclosure is to be mounted on the exterior wall, preferably as close to the meter vault as possible to minimize coax length.
 - The exterior enclosure is to be mounted between 10 feet and 12 feet above finish grade to allow signal propagation to meter reading equipment.
 - j) A minimum of 6" clearance above external enclosure is required to allow for antenna installation.
 - The exterior enclosure will be the mounting and make up location for the exterior antenna.



TOP VIEW

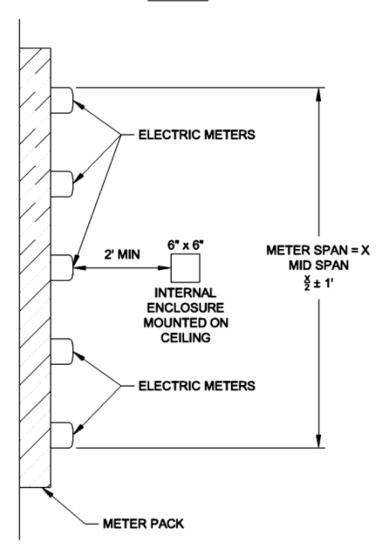


Figure 37 - Meter Vault



4.1.4 Meter Identification

For multi-unit dwellings with a separate meter for each customer all meter sockets must be marked with engraved or embossed lettering. The equipment installer / electrician are responsible to provide a label with the unit number or address on both the meter socket and unit panel. A house meter for common facilities must be marked as "House Meter". Marking must be complete before meters can be installed. If there is no address on building, meter socket must be labeled with address.

Labels shall be of an engraved or embossed type, minimum size ½" x 2" engraved plastic with sticky back. Letters or numbers must be a minimum of 5/16". Individual screw on house numbers/letters will not be accepted.

Common gas and electric meters must have the same space designation marking; i.e., numbers or letters.

Avista will not install any meters at multi-metered facilities until each individual meter is properly labeled and each circuit is physically verified jointly by the installing electrician and Avista's meter installer. The building owner must provide Avista's meter installer or Customer Project Coordinator with a floor plan or similar document clearly identifying each unit's physical location and address in order to perform this physical audit prior to meter installation.

The building owner is responsible for proper identification of electric and gas meters. The building owner could be held responsible for Avista costs associated with correcting billing errors caused by mixing wiring or mislabeled meters.

If two electric services service one building or space, a warning tag must be located at each meter point indicating such. Refer to NEC Article 230.2E.

Labels, as described above, marked with voltage and phasing information are required if two or more services with different voltages or phasing are supplied to a building.

Phenolic labels can be purchased in the Spokane area at the following locations: Engraver at 3817 N. Monroe, Spokane; Quick Engraving at 1527 E 9th, Spokane; Northwest Business Stamp at 5218 N Market, Spokane; and other locations.

4.1.5 Security

- No conduit bodies (i.e. LBs, junction boxes, etc.) are allowed ahead of meter.
- All removable enclosure covers or doors, raceways or conduits containing unmetered conductors shall be sealable for locking by Avista.
- Factory installed carriage bolts may be used to seal panel covers that do not require field removal.
- Only rain tight enclosure doors may cover the sealed areas.
- Sealable latches, stud and wing-nuts, or sealing screws shall be used to seal removable doors.
- Acceptable sealing devices:



- Stud and wing-nut assemblies, ¼ inch x 20 (minimum). The stud and associated wing-nut shall have 0.0635 inches holes
- Sealing screws with 0.0635 inch holes.

4.1.6 Meter Mounting

Meter sockets and/or enclosures must be plumb and level and securely mounted to a rigid surface. Mounting to metal siding only is not acceptable.

If a meter socket is to be mounted to a post or pole, it must be mounted on C-channel securely fastened to the pole/post. Post must be at least 2" galvanized steel with threaded caps.

All 480V 200 amp self-contained and all 400 amp galvanized meter cans that are standalone and not attached to a building must be mounted on unistrut attached to two 2 inch rigid steel pipes (with threaded steel caps) imbedded in concrete.

Meter sockets must be flush-mount or surface-mount and not recessed behind any building material.

Single meters shall be installed between <u>four and six feet to the center of the meter</u> above the floor or finished grade. Meter modules shall be install led no more than six feet to the center of the top meter and not less than 24 inches to the center of the bottom meter.

4.1.7 Lifting Handles

When lifting handles are required on panels and covers of enclosures, each handle shall be sized for full hand grasping, securely attached and designed to support 75 lbs. Chest type handles with a folding bale grasp are not acceptable.

4.1.8 Sprinkler Service

120V/240 volt sprinkler services must be provided instead of 120 voltage single phase. <u>UL listed combination meter socket and breaker panel are not available for 120V single phase service</u>.



4.2 SELF CONTAINED METERING

4.2.1 Manual Circuit Closing (MCC) Sockets

Manual circuit closing, MCC sockets allow the meter to be removed without interruption of the electrical service. When required they must be in working condition. Wiring in the socket must not interfere with the operation of circuit closers. MCC sockets must be approved by Avista.

The following services require MCC Sockets:

- All commercial services including meter modules.
- All 480V services and pumps require MCC safety sockets.
- 400 A residential services, optional on 200 permanent or temporary services.
- House meters serving common area in apartment buildings.
- Digital commercial signs.
- Irrigation controls.
- Pumps.
- Interconnected Customer Generators.
- Meter modules with slide type and horn style bypasses are <u>not</u> approved.



4.3 METERING EQUIPMENT RATINGS AND TYPE

4.3.1 Approved Self-Contained Sockets

NOTES:

- 1. Meter modules with slide type and horn style bypasses are not approved.
- 2. Meter sockets not listed must be individually approved by Avista's area meter technician.
- 3. Avista will not hook up overhead meter sockets being used for underground service, even if they have been approved by the local authority having jurisdiction (They do not have adequate horizontal space).
- 4. Customer is responsible for selecting the correct meter base top and accessories (e.g. hub, closing plate, or blank).
- 5. MCC Manual Circuit Closing / Bypass meter socket.


Service	Voltage	Meter Socket	Capacity (Amperes)	Make	Model
Single-			100	Eaton	121314 (OH only)
Phase,	120V	4 Terminal	OH only	Milbank	U3504 (OH only)
2-Wire			Off Offig		
			100	Eaton	121314 (OH only)
			OH only	Milbank	U3504 (OH only)
				Eaton	U264 (OH/UG)
				Laton	124 TB (OH/UG)
					U1211 (OH/UG)
			200	Milbank	U3852 (OH/UG)
				Willbarik	U9801 (OH only)
					U3514 (OH only)
		4 Terminal		Siemens	40404 with ground lugs (OH/UG)
Single-		MCC required		0.0	404042-01 (OH/UG)
Phase.	120/240V	for commercial			UTH430CH & ARP00429CH (OH only)
3-Wire	120/240			Eaton	UTH433CH & ARP00429CH (OH/UG)
0 110					U4042MCC (UG Only)
			400		U1797-O-K3L-K2L (UG only)
			(320A Cont.) Residential		U1129-O-K3L-K2L (UG only)
				Milbank	U3251-O-200-CB & K4920 (UG only)
			Only	Only	U3548 (OH/UG)
					U1079 & K1540 (OH only)
				Siemens	47704 & 60162 (OH only)
					44704 & 60162 (UG only)
		CT Socket	201 - 1,000		se instrument transformer metering
		O. COOKOL	201 1,000	DO-7.313,	ESR Section 4.4


Table 9 – Self-Contained Socket Required Metering Equipment


AVISTA Utilities Distribution Standards DO-7.315/DU-9.315 ESR



4.3.2 Self-Contained In-Line Socket Diagrams

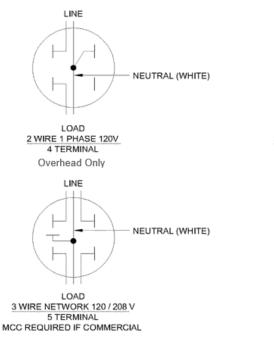








Figure 38 - Self-Contained In-Line Meter Socket Diagrams

AVISTA Utilities Distribution Standards DO-7.314/DU-9.314 ESR



4.4 INSTRUMENT TRANSFORMER METERING

Current transformers meter and wiring are provided by Avista. The customer provides solidly mounted approved meter enclosures or sockets, current transformer enclosures, and conduit.

4.4.1 Current Transformer Location

CT's are normally mounted in an enclosure located on the building.

At Avista's option, current transformers may be mounted in a three-phase pad mount transformer that is dedicated to only one customer. In this case the meter enclosure is mounted next to the pad or in an approved location.

CTs will not be mounted in single phase pad transformers.

On overhead transformers larger than 300KVA Avista would prefer to locate CT's at the transformers on the rack.

4.4.2 CT Metering Conduit Requirements

- Conduit length must be such that wire length between meter(s) and current transformer(s) is less than thirty feet.
- 1 inch gray electrical PVC.
- Schedule 80 PVC and fittings, rigid above grade.
- Minimum sweep radius is 9".
- Maximum of two 90 degree sweeps.
- Bushings are required at both ends of the conduit run. The local inspector may require grounding bushings.
- The ends of the conduit must be taped or capped, and sealed to keep dirt and water out of the conduit. Customer is responsible for any obstructions within the conduit.
- All conduit connections must be glued and fully seated and a pull string installed if there is more than 20' of one inch conduit.

4.4.3 CT Enclosures - General Requirements

- Weatherproof.
- For underground service installation, use side-bottom knockouts of CT enclosure (do not use center-bottom knockouts). Use the knockout opposite of the neutral lug.
 - The conduit must enter in the bottom of the enclosure or on the side within 2" of the bottom with a rain tight fitting if service is fed from underground.
 - Conduit may enter top of enclosure if service is fed from overhead provided rain tight fittings are utilized.



- Enclosures cannot be used as junction boxes or raceways.
- Lockable.
- Each CT metered service requires its own CT enclosure and meter enclosure or socket.
- Avista will no longer allow or hookup new or repaired CT enclosures mounted on plywood. Unistrut type cross struts are the required attachment points for enclosures.
- CT cans must have a hinged door with fixed handles for removing.



4.4.4 Single Phase Current Transformer Metering

1 PHASE CURRENT TRANSFORMER METERING OVERHEAD AND UNDERGROUND 401 TO 800 AMPS RESIDENTIAL

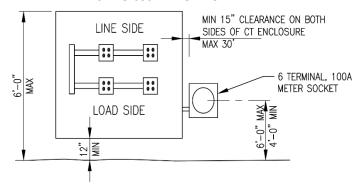


Figure 39 – Single Phase Current Transformer Metering 401 to 800 Amps CT Enclosure

- CT cans must have a hinged door with fixed handles for removing. Doors must be equipped with sealing and locking provisions.
- * Type 3R, ANSI 61 gray

Service Ampacity	WxHxD	Cooper B-Line	Milbank	Hoffman
201-400 AMP (Residential Only)	30x30x11 in	303011RTCT	CT303011SC	A303011CT
401-800 AMP	36x48x11 in	364811HRTCT	CT364811HC	A483611HCT

CT Landing Platforms

Part #'s or Equivalent

Forbar type ANSI C12.11 CT's

* 600V, 50kA AIC

Line & Load side Mechanical Lugs

401-800 AMP	36x48x11 in	6019 HEL	K4729
201-400 AMP (Residential Only)	30x30x11 in	6019 HAL	K4903
Service Ampacity	WxHxD	Cooper B-Line	Milbank

Approved 6 Terminal, 100A Meter Socket



Manufacturer	Part #
COOPER B LINE	U121315-50365
MILBANK	U3504XL Plus (2) 5T8K2

NOTES:

- The customer supplies and installs the current transformer enclosure, mounting base, meter enclosure. Avista supplies and installs the current transformers, instrument wiring and meter.
- The conduit connecting the current transformer and meter enclosures shall enter each enclosure either below (preferred) or above cable terminals and bussing for ease of routing conductors between enclosures.
- Current transformer enclosure must be bonded and grounded per NEC requirements by customer.
- Avista will supply, install, and connect conductor to the line side only on UNDERGROUND services. The customer supplies, installs and connects conductor on OVERHEAD services.
- Customer supplies landing lugs for Avista conductors on UNDERGROUND services.
- 6. CT landing platforms are rated on diversified load.
- Inside commercial grow operations cannot exceed 800 amps of true load on single phase service.

AVISTA Utilities Distribution Standards DO-7.313 ESR



5.0 SERVICE VOLTAGES

Figure 40 Coming Voltages	Nominal Voltage 120V 2 Wire 120/240V 3 Wire 120/208 3 wire 480V 3 wire Delta 120/240V 4 wire R80V 3 wire Ungrounded Delta C777/480V 4 wire Resistance Grounded		Line-Neutral 114-126 114-126 114-126 114-126 114-126	Line - Line - Line - 197-218 197-218 228-252 228-252 197-218 456-504	Service Voltage Range (N2) e	Application Street and traffic lights, controls, signs etc. 120V 2-wire meter socket required. Residential, small commercial. OHD maximum limited by the largest transformer that can be pole mounted Residential, small commercial where 120/208 three phase is available. Maximum load on a single service may be limited to provide three phase load balance. Special applications, freeway and ball field lighting, rail and other. URD transformers are special order, contact Engineering, Center tap grounded for safety & limit line to ground voltage. Small commercial / industrial serving a combination of single phase 120/240 and three phase 240V loads. Service may be URD fed from OHD transformer bank. Use to supply large single-phase 120/240 volt loads and small three-phase 240 volt loads. Maximum simultaneous three-phase motor load is 25 th. Commercial, small industrial, large apartment buildings. Spokane Core Network. Contact Network Engineering for services in the Core Network. NOT OFFERED FOR NEW SERVICES See DO-4.126 for replacement OHD banks. Resistance grounded service limited to special industrial applications to limit ground faults. Customer to supply grounding resistor. Contact Engineering.
••	277/480V 4 wire	0	263-291	456-504	3PH 15-500 - OHD 3PH 45-1500 - URD	Large commercial, industrial. Normally limited to loads above 20-30 kVa Spokane Core Network. Contact Network Engineering for services in the Core Network.
	2400V 3 wire			2340-2520	NA - OHD 3PH 300-1000 - URD	Large pumps, industrial motors. OHD Services are a special application not offered for new services.

Figure 40 - Service Voltages

AVISTA Utilities Distribution Standards DO-6.302/DU-7.600 ESR



NOTES:

- Available service voltage is determined by Avista based on power and energy needs as well as the supply system on hand in the area. Requests for service voltages, sizes and special applications other than those listed should be referred to Distribution Engineering.
- Service voltage is measured at the point of delivery. This point is where Utility
 service conductors and customer service entrance conductors are connected.
 Service voltage ranges may differ from those listed during emergencies or for
 some rural customers because of the distance from the source. Voltages may
 temporarily fluctuate outside the listed ranges as loads start and stop or during
 fault conditions.
- Objectionable voltage variations caused by customer loads are corrected at customer expense.
- 4. Record service voltage at the meter over several days with customer loads operating under stable but maximum conditions to determine if they are within the allowable range. A single reading with a multimeter will provide a quick check only. Normally changes should not be made by adjusting transformer taps.
- Primary voltage may be measured by using the secondary of a lightly loaded or unloaded transformer. Multiply by primary / secondary voltage ratio or the winding ratio if known.
- 6. The utility system is designed and operated to limit the maximum voltage unbalance between phases. A maximum of 3% is expected under normal conditions at the point of delivery of an unloaded service. All three phase voltages must still be within the Service Voltage Range. Motors and other three phase equipment may need to be de-rated for unbalance over 1%.
 - % Unbalance = Max Voltage Deviation from Avg Phase Voltage/Avg Phase Voltage

Example: For phase voltages of 230, 232, and 225, the average 229: the maximum deviation from average is 4: and the percent unbalance is $(100 \times 4)/229 = 1.75$ percent.

REFERENCES:

- ANSI C84.1 2006
- 2. WAC 480-100-373
- 3. Avista Utilities Schedule 70 Rule 5 "Definitions"
- Avista Utilities Schedule 70 Rule 16 "Continuity of Service"
- 5. Avista Utilities Schedule 70 Rule 17 "Optional Phase and Voltage"
- 6. Avista Utilities Electric Service and Meter Requirements

AVISTA Utilities Distribution Standards DO-6.302/DU-7.600 ESR



6.0 CUSTOMER GENERATION REQUIREMENTS

There are two general forms of Customer generation. The first is interconnected with the utility system to supply energy. The other is an emergency standby system.

6.1 Generation Interconnection

Whether you're thinking about or moving forward with the installation of an electrical generating system, Avista has put together the information you will need to interconnect to our system. In some cases, Avista might also be able to offer a Renewable Generation Incentive (RGI) that provides direct payments to help offset and recover costs of renewable energy systems in Washington State. More information on this incentive can be found at:

https://myavista.com/energy-savings/green-options/onsite-generation/getting-connected

Interconnection requirements are separated into two different types of systems.

The various documents required for interconnection differed by system category. Please be sure to read all of the information, as <u>approvals are required from Avista before</u> <u>generation can be interconnected with the utility</u>. If you have any questions, please contact the key contacts for either type of system.

Interconnection of systems 500 kW and less:

Contact: Solar at Avista solar@avistacorp.com

Documents available through our key contact or at:

https://myavista.com/energy-savings/green-options/onsite-generation/getting-connected

Interconnection of systems between 500 kW and 20 MW

Contact: Warren Clark at:

warren.clark@avistacorp.com or call 509-495-4186.

Documents available through our key contactor or at:

https://myavista.com/energy-savings/green-options/onsite-generation/interconnection



Net-Meter Generation 100 kW or smaller in Washington and Idaho

	Submit an application to Avista Utilities Interconnection inverter must be UL1741 listed. Electrical schematic drawing must be included. Include provisions for a lockable visible disconnect if required by Avista Utilities or local jurisdiction.
	Send Payment to:
	Solar at Avista, MSC-15 1411 E Mission Ave Spokane, WA 99202
	Receive written design approval from Avista Utilities.
	Get an electrical permit from government jurisdiction. Follow the National Electric Code (NEC) as required.
	Complete the installation.
	Customer must install a separate meter base for generation production measurement by Avista Utilities. Meter base must be Labeled "Generation Production Meter" with permanent placard. (Avista will provide and install the production meter).
	Label lockable, blade type, visual open generation disconnect switch with permanent placard.
_ ✓	Get inspections from a state electrical inspector. After final electrical inspection approval contact Avista Utilities for production meter installation and utility inspection. Contact phone (509) 495-4204.
	Avista Utilities installs new bi-directional and generation production meters.
	Start generating power.
	e Taps are not recommended inside meter can for generation interconnections. vista Utilities for Preapproval before Installation.

Net metered generator disconnect switch must be a lockable, blade type, visual open, disconnect switch and in the generation circuit along with the Production Meter within ten feet of the existing Avista revenue meter and readily accessible by Avista personnel.





Figure 41 – Generation Production Meter and Disconnect Location

AVISTA Utilities Distribution Standards DO-7.330/DU-9.127 ESR



6.2 Emergency / Standby Generation

These are the minimum requirements for connecting standby and emergency power supplies for use when the normal utility electrical supply is interrupted.

Improperly installed standby and emergency power supplies are extremely hazardous to utility workers, the public and the customer. The customer could be held liable for substantial injuries and damages caused by an improperly installed, maintained, or operated system. A proper installation ensures:

- Utility workers are not exposed to electrical shock hazards during service restoration.
- 2. Other customer's appliances are not damaged from operating with inadequate power supplied from a distant source.
- 3. The standby or emergency power supply will avoid damage from operating on a shorted line or with too large of a load.
- 4. Electric meters are not be damaged, and
- 5. Customer wiring is not damaged.

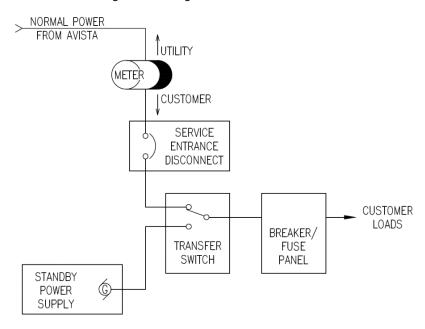


Figure 42 – Standby Generation



NOTES:

- N1. Avista strictly prohibits the installation of customer owned meter collars, including meter socket transfer switches such as GenerLink. Avista's engineers do not feel that such installations meet our high standard for customer safety because Avista does not inspect, test, or maintain customer owned equipment and neither the customer nor the fire department would be able to remove or isolate meter collars in the event that the device fails or catches fire
- N2. The Customer is responsible for all costs associated with changes to the service entrance and service drop.
- N3. When operating, the standby or emergency power supply must remain isolated from the utility power system at all times so it will not energize the service drop, transformer or primary line.
- N4. A transfer switch designed to prevent the inadvertent interconnection of normal and standby/emergency power sources shall be installed on the load side of the meter. This switch must disconnect all ungrounded conductors from one power source before connecting them to the other (break before make type).
- N5. A service entrance rated breaker or fused disconnect shall be provided between the transfer switch and meter. This requirement may be met using either service entrance rated transfer equipment (integrated overcurrent protection, disconnect and transfer switch) or separate units for each function.
- N6. The grounded service conductor, system neutral, and system ground must be bonded at the normal utility power service entrance.
- N7. If the standby or emergency power source has a bonded neutral-ground connection (separately derived system), then the transfer switch must switch both the ungrounded conductors, and the grounded system neutral conductor.
- N8. If the standby or emergency power source has an un-bonded, floating neutral (non-separately derived system), then the transfer switch must switch only the ungrounded conductors. The grounded system neutral conductor must remain solidly bonded through the transfer switch.
- N9. If a power inlet is used to connect a mobile standby or emergency power source, then a sign located at the power inlet must clearly indicate if the source must be separately derived (bonded neutral) or non-separately derived (floating neutral).
- N10. The customer shall notify the local Avista office before and after modifying the service entrance. Meter removal must be authorized by Avista. Wiring must comply with all state and local electrical codes and must be approved and tagged by an authorized electrical inspector before the meter is replaced and resealed.
- N11. No customer should work on or permit others to work on his own equipment unless both sources are disconnected, properly tagged and locked out, and the circuit is adequately grounded.



- N12. IF THE EMERGENCY POWER SUPPLY IS TO PARALLEL AVISTA'S DISTRIBUTION SYSTEM AT ANY TIME, CONTACT DISTRIBUTION ENGINEERING FOR PROPER COMPLIANCE BEFORE EMERGENCY POWER SUPPLY IS OPERATIONAL.
- N13. The Customer's wiring must comply with all state and local electrical codes.
- N14. The Customer should contact the local Avista office for additional information.

REFERENCES:

- 1. NFPA 70 National Electric Code (NEC) Article 700: Emergency Systems
- NFPA 70 National Electric Code (NEC) Article 701: Legally Required Standby Systems
- 3. NFPA 70 National Electric Code (NEC) Article 702: Optional Standby Systems
- 4. NFPA 70 National Electric Code (NEC) Articles 445: Generators
- 5. NFPA 70 National Electric Code (NEC) Articles 250: Grounding and Bonding

AVISTA Utilities Distribution Standards DO-7.320/DU-9.120/ESR



7.0 ELECTRICAL FORMULAS & COMMON TERMS

To Find	Direct Current	1Ø	Alternating Currer 2Ø – 4 Wire*	nt 3Ø
Amperes from horsepow er	hp x 746 E x % eff	hp x 746 E x % eff x pf	hp x 746 2 x E x % eff x pf	hp x 746 1.73 x E x % eff x pf
Amperes from kilowatts		$\frac{kw \ x \ 1000}{E \ x \ pf}$	$\frac{kw \ x \ 1000}{2 \ x \ E \ x \ pf}$	$\frac{kw \times 1000}{1.73 \times E \times pf}$
Amperes from kva		$\frac{kva \ x \ 1000}{E}$	$\frac{kva \times 1000}{2 \times E}$	kva x 1000 1.73 x E
kilowatts	$\frac{I \times E}{1000}$	$\frac{I \times E \times pf}{1000}$	$\frac{I \times E \times 2 \times pf}{1000}$	$\frac{I \times E \times 1.73 \times pf}{1000}$
kva		$\frac{I \times E}{1000}$	$\frac{I \times E \times 2}{1000}$	$\frac{I \times E \times 1.73}{1000}$
Horsepow er (output)	1 x E x %efj 746	$\frac{I \times E \times \%eff \times p}{746}$	I x E x 2 x %eff x 1 746	1 x E x 1.73 x %eff x 746
Power factor		$\frac{kw \ x \ 1000}{I \ x \ E}$	kw x 1000 I x E x 2	kw x 1000 I x E x 1.73

^{*}For 3W, 2Ø circuits the current in the common conductor is 1.41 times that in either of the other conductors.



Common electrical terms

Ampere	I = Unit of current or rate of electricity flow	Watthour or Kilowatt hour	Whr = unit of electrical work or kWhr = 1000 whrs
Volt	E = Unit of voltage or potential difference between two points. Similar to pressure.	Horsepower	Hp = measure of the rate work is performed Equivalent to; 746 watts or raising 33,000 lbs, one ft, in one minute
OHM	R = Unit of resistance to electrical flow	Demand factor	The ratio of maximum demand of a system to the total connected load.
Volt amperes or Kilovolt ampere	Va = unit of apparent power or kVa = 1000 volt amperes	Diversity factor	The ratio of the sum of individual maximum demands of the various parts of a system to the maximum demand of the whole system
Watt or Kilowatt	W = unit of real power kW = 1000 watts	Load factor	The ratio of the average load over a designated period of time to the peak load occurring in that period.
Power factor	Pf = ratio of real to apparent power		

Table 10 Electrical Formulas and Common Terms



CALL BEFORE YOU DIG





CALL 2 DAYS BEFORE YOU DIG

NATIONAL # 811

LOCAL AREA NUMBERS

SPOKANE	1-800-424-5555
PULLMAN-MOSCOW	1-800-424-5555
LEWISTON	1-800-324-1585
CLARKSTON-800-5534344	

COEUR D'ALENE AREAS:

BENEWAH – SHOSHONE CO	1-800-398-3285
BONNER – BOUNDARY CO	1-800-626-4950
KOOTENAI CO	1-800-428-4950



APPENDIX A - LIST OF FIGURES

Figure 1 – New Underground or Overhead Electric Service Transformer or Handhole on the Street Side	14
Figure 2 – New Underground Service Transformer in the Backyard	14
Figure 3 – New Overhead Service Transformer in Backyard	15
Figure 4 – Cable Phase Rotation Marking	17
Figure 5 – Electric Conduit Sweep Specifications	26
Figure 6 – Location of Sweeps on Avista Poles	27
Figure 7 – Joint Use New Riser Installation	29
Figure 8 – Gas and Electric Meter Clearances	32
Figure 9 – Flood Zone Meter Enclosure Installation	35
Figure 10 – Temporary Overhead Service	38
Figure 11 – Overhead Service Clearances over Ground and Buildings	39
Figure 12- Temporary Underground Service	41
Figure 13 – Roof Cricket	46
Figure 14 – Overhead House Mast	48
Figure 15 – Overhead to Overhead Service Pole	51
Figure 16 – Overhead to Underground Service Pole	54
Figure 17 – Overhead Service Clearances at Building	57
Figure 18 – Clearances to Buildings and Appurtenances	59
Figure 19 – Overhead Service Clearances over Ground and Buildings	62
Figure 20 – Clearances Around Swimming Pools and Hot Tubs	64
Figure 21 – Service Ditch Detail	68
Figure 22 – Clearance to Transformers	70
Figure 23 – Clearances between Hydrants and Fuel Oil, Diesel, or Gasoline Tanks	72
Figure 24 – Underground Clearance for Swimming Pools	73
Figure 25 – Underground Clearances for New Developments	
Figure 26 – Residential Underground Exterior Service	
Figure 27 – Residential Underground Exterior Service, Recessed	
Figure 28 – Underground Service Pedestal	
-	



Figure 29 – 200 A Post Type Meter Pedestal Installation	80
Figure 30 – 200 A Pipe Meter Pedestal Installation	81
Figure 31 – 200 A Pipe Meter Pedestal Install Photo	81
Figure 32 – 400 A Pipe Meter Pedestal Installation	82
Figure 33 – 400 A Pipe Meter Pedestal Install Photo	82
Figure 34 – Pedestal Mounted Meter Enclosure, Dedicated Transformer	84
Figure 35 – Conduit Entrance Single-Phase Transformer	85
Figure 36 – Conduit Entrance for 1 and 2 Phase Padmounted Junction Enclosures	86
Figure 37 – Meter Vault	90
Figure 38 – Self-Contained In-Line Meter Socket Diagrams	95
Figure 39 – Single Phase Current Transformer Metering 401 to 800 Amps CT Enclosure	
Figure 40 – Service Voltages	100
Figure 41 – Generation Production Meter and Disconnect Location	104
Figure 42 – Standby Generation	105



APPENDIX B - LIST OF TABLES

Table 1 - Service Conduit Sizing	25
Table 2 - Conduit Sweep Sizing	26
Table 3 – Single Phase Point of Delivery Available Fault Current	33
Table 4 – Three Phase Point of Delivery Available Fault Current	34
Table 5 – Clearances to Buildings and Appurtenances	60
Table 6 – Clearances Around Swimming Pools and Hot Tubs	64
Table 7 – Burial Depths for URD Cable	68
Table 8 – Clearance: Propane Storage Tanks and Electrical Equipment	72
Table 9 – Self-Contained Socket Required Metering Equipment	94
Table 10 Electrical Formulas and Common Terms	109



INDEX

Avista Utilities	power conditioning devices, 20
contacts, 9	pulling enclosure, 12
representative, 12, 13, 15, 19	pulling/termination enclosure, 12, 89
Bypasses	raceway, 16
horn style, 93	roof cricket, 45, 46
slide type, 93	sweep, 23, 67, 78, 96
Conduit, 16, 23, 24, 25, 26, 27, 42, 44,	switch gear, 12
47, 49, 67, 78, 85, 86, 91, 96, 97	switchboard, 11
pull strings, 23	transformer, 12, 19, 23, 33, 38, 42,
swedge couplings, 24, 26	44, 66, 67, 96, 101, 106
type, 24	weatherhead, 18, 43, 45
Customer Account	Excavation
flat rate, 15	call before you dig, 7
•	
Customer Generation, 102 emergency, 105	Facility anchor point, 47
net-metered, 103	apartment, 43, 93
Customer Responsibility	buildings, 11, 12, 39, 59, 62, 72
costs, 19, 21, 42, 91, 102	carports, 13
equipment, 12 expense, 19, 88, 101	drain fields, 13 eave, 79
obstructions, 8, 23, 96	federal buildings, 10 <u>fence,</u> 13
payment, 11, 43, 44 Ditch, 42, 44, 67	
backfill, 23, 42, 44, 67, 78	flood zones, 35 fuel tanks, 13
excavators, 67	future buildings, 13
joint ditch, 20 Electric Vehicles, 19	gable, 45, 46 hot tubs, 64
Electrical Permit, 10, 41, 75, 78, 106	individual tenant spaces, 11
inspection sticker, 10	irrigation, 93
Equipment	landscaping, 20
air conditioners, 19	mobile homes, 6, 43
chubs, 47	patios, 13
ct enclosure, 97	porches, 13
current transformer, 66, 96	residential, 12, 13, 20, 32, 43, 75
electric space heating, 19	roadway crossings, 23
electric space fleating, 19 electric tankless water heating	septic systems, 13
systems, 19	slab, 12, 89
handhole, 14, 23, 67	sub-divided, 12
house knobs, 47	swimming pools, 64, 72
junction enclosure, 86	vehicular traffic, 88
large motors, 19	wall, 12, 45, 46, 89, 92
lugs, 66, 98	Fault Current, 33, 42
luminaries, 20	Gas, 32
mast head. See weatherhead masts, 45, 47	Labels, 91 Lifting Handles, 92
multiple masts, 47	
	Lock, 88
pedestals, 79	Metering Equipment, 12, 87



MCC Sockets, 93 delta four wire, 15 meter locking device, 11 disconnection, 11, 16, 20, 66, 87, meter seals, 20 103, 105, 106 meter socket, 20, 21, 87, 91, 92 fault current, 33, 34 self contained sockets, 94 location, 11, 13 National Electrical Code, 10, 18, 91 major changes, i, 19 Point of Delivery, 11, 12, 13, 19, 42, 45, phase designation, 17 phase rotation, 17, 18 101 definition, 11 phases, 15, 101 Power Quality, 37 reconnection, 10 Project Phase residential service definition, 43 early planning, 12 service pole, 51, 54 Public Utility Commission, 10 service voltage, 15, 101 Service single point of service, 12 accessibility, 13 sprinkler, 92 agreement, 11, 43, 44 temporary, 38, 41, 42 altered, 13 underground service, 12, 13 capacity requirements, 13 wye service, 21 clearances, 32, 39, 47, 57, 59, 60, Trees, 11, 20 62, 64 Voltage Flicker, 21 delta - high leg, 16, 18 Voltage Unbalance, 101

